

WAAS CH 57930 W22A	APP CRS 220°	Rwy Idg 3600 TDZE 1171 Apt Elev 1171
--	------------------------	---


RNAV (GPS) RWY 22
IOWA COUNTY (MRJ)

RNP APCH - GPS.

T Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Platteville altimeter setting and increase LPV DA to 1476 feet, increase LNAV/VNAV DA to 1534 feet, increase all MDAs 60 feet, and LNAV visibility Cat C $\frac{1}{4}$ SM.


MISSED APPROACH:
Climb to 3500 direct
ZUPOV and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
-------------------	--------------------------------	--------------------------

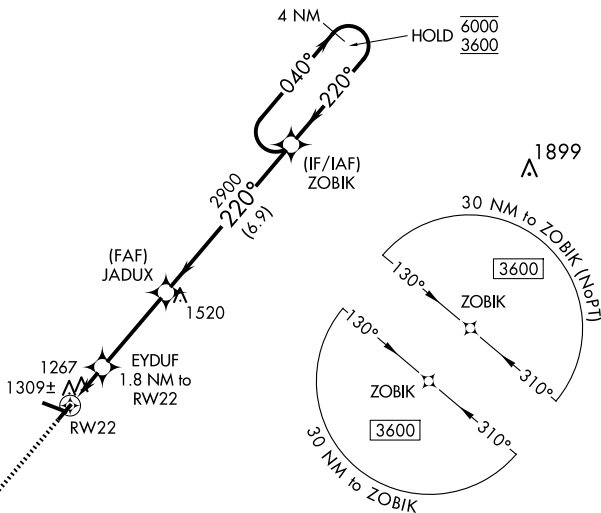

MISSED APCH FIX
ZUPOV

ELEV	1171	TDZE	1171
------	------	------	------



3500 ↑	ZUPOV 	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 30).		4 NM Holding Pattern
CATEGORY				
LPV DA	1421-1 250 (300-1)			NA
LNNAV/ VNAV	1479-1 308 (400-1)			NA
LNNAV MDA	1580-1 409 (500-1)	1580-1 $\frac{1}{8}$ 409 (500-1 $\frac{1}{8}$)		NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 $\frac{1}{2}$ 469 (500-1 $\frac{1}{2}$)	NA

RNAV (GPS) RWY 22