

WAAS
CH **40033**
W08A

APP CRS
084°

Rwy Idg
TDZE **170**
Apt Elev **176**


RNAV (GPS) RWY 8

CAMILLA-MITCHELL COUNTY (CXU)

Baro-VNAV NA when using Albany altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 513 feet; increase LNAV/VNAV DA to 623 feet; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2400 direct CEVOR and hold.

AWOS-3T 118.675	JACKSONVILLE CENTER 125.75 363.075	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

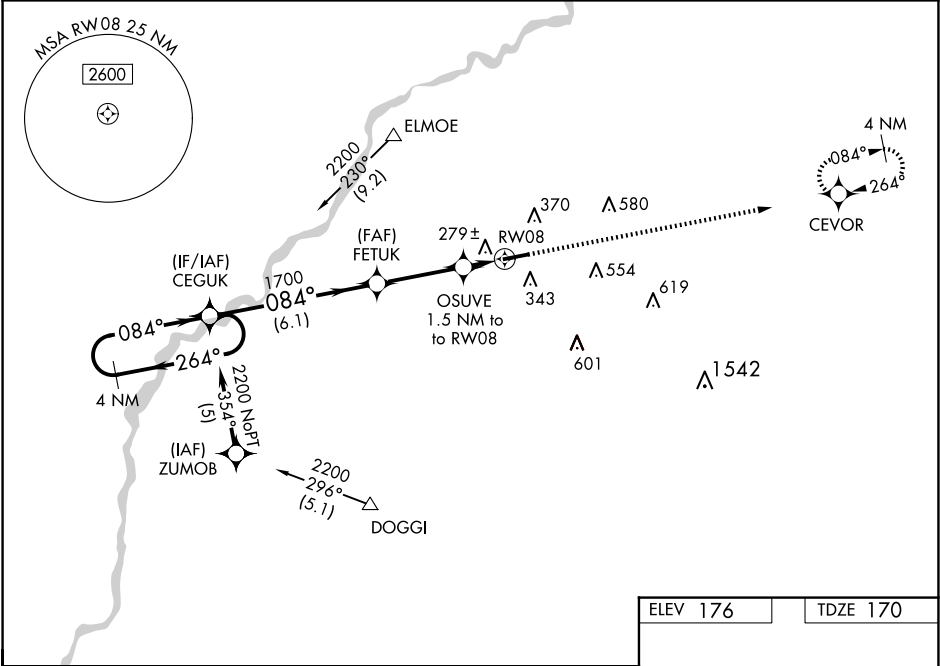

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

2400 CEVOR

GP 3.00° TCH 52

CEVOR

084°

221±

5004 X 100

26

*LNAV only.

6.1 NM

3.2 NM

1.5

RW08

OSUVE 1.5 NM to to RW08

FETUK 1700

CEGUK

2200

264°

084°

084°

1700

*680

CATEGORY	A	B	C	D
LPV DA		465-1	295 (300-1)	
LNAV/VNAV DA		575-1⅜	405 (400-1⅜)	
LNAV MDA		540-1	370 (400-1)	
CIRCLING	720-1 544 (600-1)	760-1 584 (600-1)	920-2¼ 744 (800-2¼)	940-2½ 764 (800-2½)

REIL Rwy 8 and 26 0
MIRL Rwy 8-26 0