

WAAS CH 45803 W19A	APP CRS 187°	Rwy Idg 4206 TDZE 795 Apt Elev 798
--	------------------------	---


RNAV (GPS) RWY 19
SKYHAVEN (RCM)

RNP APCH - GPS.

▼ Baro-VNAV NA when using Whiteman AFB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Knob Noster altimeter setting and increase LPV DA to 1084 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities ½ SM. Increase all MDAs 40 feet and Circling visibility Cat C ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
BEJCY and hold.

AWOS-3PT 119.575	WHITEMAN APP CON ★ 127.45 284.0	UNICOM 123.0 (CTAF) ①
----------------------------	---	---------------------------------

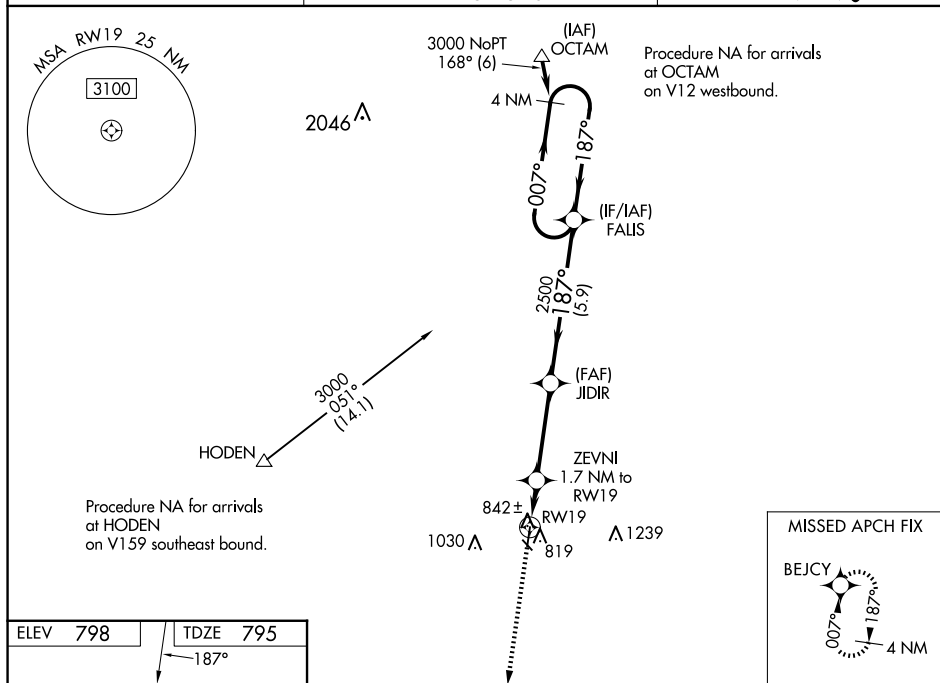

ELEV 798

TDZE 795

187°

61

4206 X 75

2801 X 60

1

0-4% Up

☆

REIL Rwy 1 and 19

REIL Rwy 14 and 32 (L)

MIRL Rwy 1-19 and 14-32 (L)

CATEGORY	A	B	C	D
LPV DA	1045-1	250 (300-1)		NA
RNAV/ VNAV DA	1100-1	305 (400-1)		NA
RNAV MDA	1240-1	445 (500-1)	1240-1 ³ / ₈ 445 (500-1 ³ / ₈)	NA
C CIRCLING	1260-1 462 (500-1)	1340-1 542 (600-1)	1380-1 ¹ / ₂ 582 (600-1 ¹ / ₂)	NA