


WAAS CH 45722 W11A	APP CRS 110°	Rwy Idg TDZE 854 Apt Elev 871	4876
--	------------------------	---	-------------

RNAV (GPS) RWY 11


LEBANON SPRINGFIELD-GEORGE HOERTER FLD (6I2)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.	MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.
---	---

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

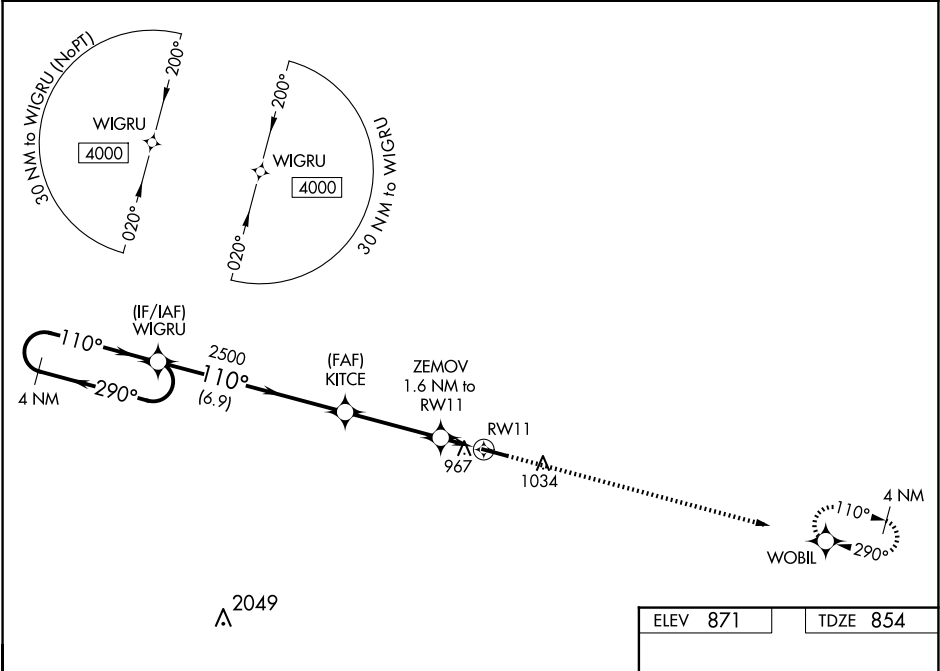

4 NM Holding Pattern	WIGRU	4000	290°	110°	110°	2500	KITCE	2500	ZEMOV 1.6 NM to RW11	RW11	1360	WOBIL
GP 3.00° TCH 36												
						6.9 NM		3.6 NM		1.6 NM		
CATEGORY	A	B	C	D								
LPV DA		1104-1	250 (300-1)									
LNAV/VNAV DA		1159-1⅓	305 (300-1⅓)									
LNAV MDA		1220-1	366 (400-1)									
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)								

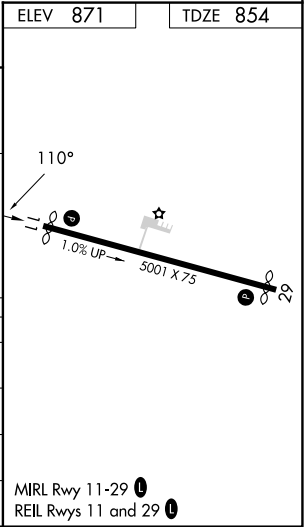

RNAV (GPS) RWY 11

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025