

WAAS

CH **45520**

W33A

APP CRS

326°

Rwy Idg

3999

TDZE

984

Api Elev

984

RNAV (GPS) RWY 33

BRENNER FLD (FNB)

RNP APCH - GPS


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV NA when using AFK altimeter setting. When local altimeter not received, use AFK altimeter setting and increase LPV DA to 1338 and LNAV/VNAV DA to 1380, increase all MDAs 120 feet.

MISSED APPROACH: Climb to 3000 direct COVUT and hold.

ASOS 119.275	ST JOSEPH APP CON ★ 120.35 360.8	UNICOM 122.8 (CTAF) 1
------------------------	--	---------------------------------

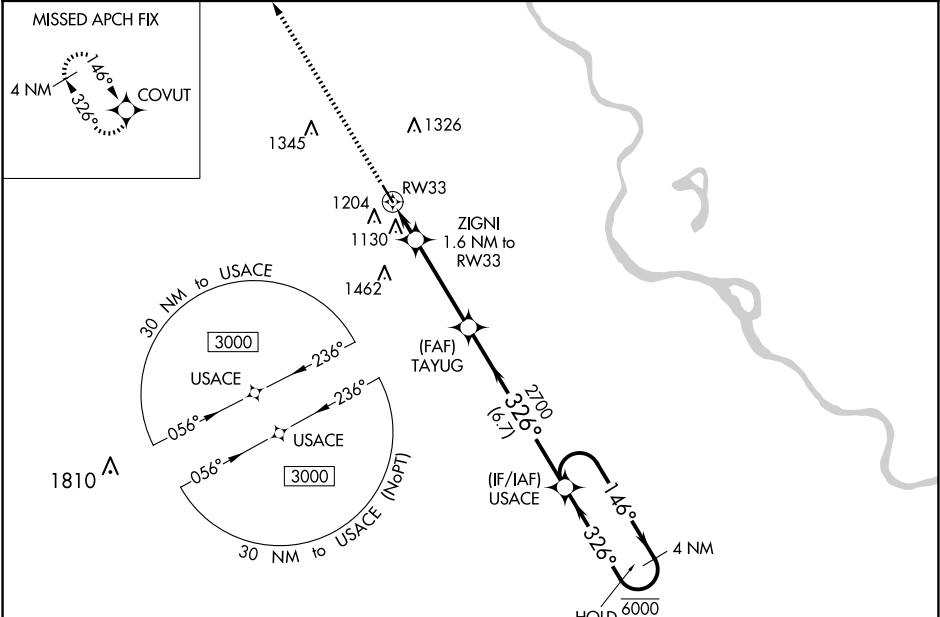

ELEV **984**

TDZE **984**

MIRL Rwy 15-33 1

REIL Rwy 15 and 33 1

3000

COVUT

TAYUG

ZIGNI

1.6 NM to RW33

RW33

1520

2700

USACE

4 NM Holding Pattern

146°

326°

6000

3000

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	1234-1	250 (300-1)	NA	
LNAV/VNAV DA	1276-1	292 (300-1)	NA	
LNAV MDA	1380-1	396 (400-1)	NA	
CIRCLING	1560-1	576 (600-1)	NA	