

WAAS CH 97328 W13A	APP CRS 131°	Rwy Idg TDZE Apt Elev	7000 208 208
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

GRENADA MUNI (GNTF)


RNP APCH.

For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Baro-VNAV and VDP NA when using Greenwood altimeter setting. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1½ SM. When local altimeter setting not received, use Greenwood altimeter setting: Increase all DAs 65 feet; increase all MDAs 80 feet and visibility LNAV Cats C and D and Circling all Cats ¼ SM. For inop ALS when using Greenwood altimeter setting, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1½ SM. Circling Rwy 4, 22 NA at night.

MALSR

MISSED APPROACH:
Climb to 3000 direct
ODPOF and hold.

AWOS-3PT 118.025	MEMPHIS CENTER 128.5 279.55	UNICOM 122.8 (CTAF)
----------------------------	---------------------------------------	-------------------------------

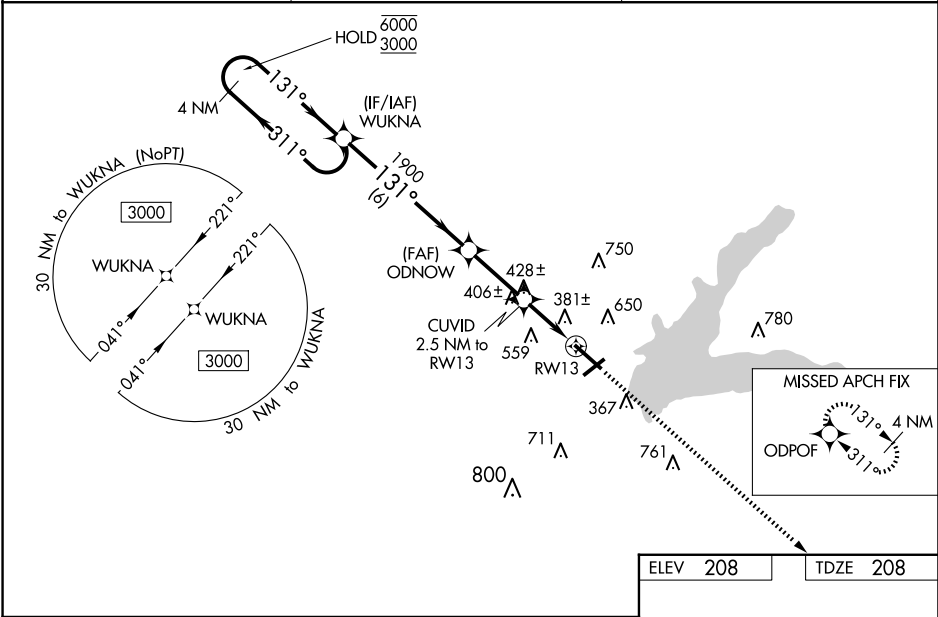

4 NM Holding Pattern WUKNA

6000 ← 311°
3000 131° →

GP 3.00°
TCH 55

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

ODNOW

CUVID 2.5 NM to RW13

*1.3 NM to RW13

RW13

*1040

6 NM 2.6 NM 1.2 NM 1.3 NM

3000 ODPOF

*LNAV only.

131°

7000 X 130

249

4998 X 99

31

CATEGORY	A	B	C	D
LPV DA	453-1½ 245 (300-1½)			
LNAV/VNAV DA	666-1⅛ 458 (500-1⅛)			
LNAV MDA	680-1½ 472 (500-½)		680-1 472 (500-1)	
CIRCLING	1000-1 792 (800-1)		1000-2¼ 1060-2¾ 792 (800-2¼) 852 (900-2¾)	

MIRL Rwy 13-31

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025