

WAAS CH 72917 W07A	APP CRS 074°	Rwy Idg 7299 TDZE 1460 Apt Elev 1478
--	------------------------	---


RNAV (GPS) RWY 7R
PHOENIX DEER VALLEY (DVT)

RNP APCH - GPS.

T When VGSI inop, Circling Rwy 25R NA at night. When local altimeter setting not received, use Scottsdale altimeter setting: increase LPV DA to 1822 feet and all visibilities $\frac{1}{2}$ SM, increase LNAV/VNAV DA to 2160 feet and all visibilities $\frac{1}{2}$ SM, increase all MDAs 40 feet and increase Circling Cat B visibility $\frac{1}{2}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro VNAV and VDP NA when using Scottsdale altimeter setting. Circling NA north of Rwy 7R-25L at night.

MISSED APPROACH: Climb to 5000 direct VIFPE and track 069° to AVENT and hold, continue climb-in-hold to 5000.

ATIS 126.5	PHOENIX APP CON 120.7 239.0	DEER VALLEY TOWER★ 118.4 (070°-250°) (CTAF) 120.2 (251°-069°)	GND CON 121.8	CLNC DEL 123.9	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	--------------------------	-------------------------

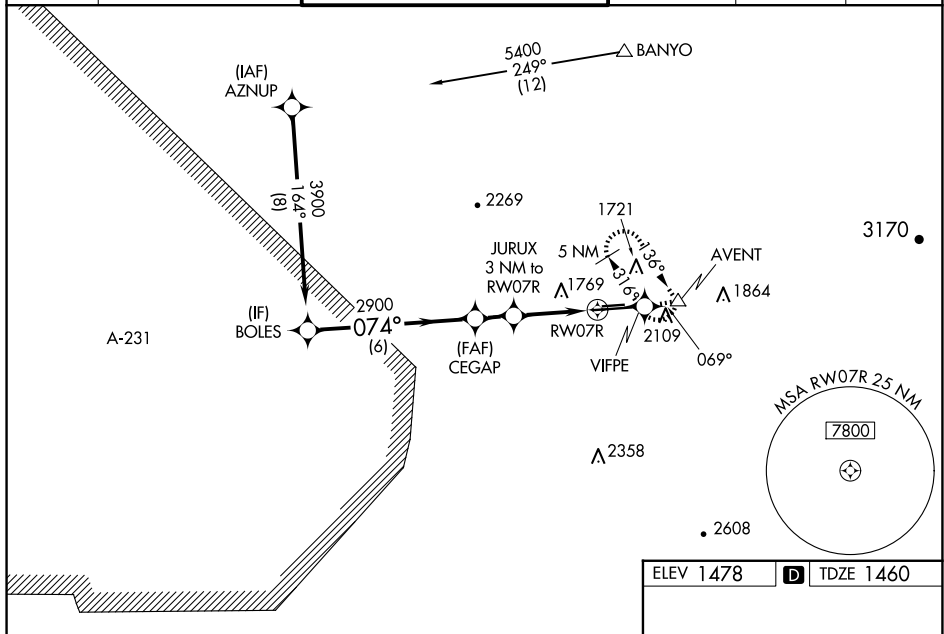

ELEV 1478	D	TDZE 1460
-----------	----------	-----------

