



|                            |                        |                                                                          |
|----------------------------|------------------------|--------------------------------------------------------------------------|
| LOC I-CGZ<br><b>111.15</b> | APP CRS<br><b>048°</b> | Rwy Idg<br>TDZE<br>Apt Elev<br><b>5200</b><br><b>1458</b><br><b>1464</b> |
|----------------------------|------------------------|--------------------------------------------------------------------------|

ILS or LOC RWY 5  
CASA GRANDE MUNI (CGZ)

|                                                                                                                                                                                                                                       |                                                                                             |                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| DME required for LOC only.                                                                                                                                                                                                            | MALSRL<br> | MISSED APPROACH: Climb to 2100 then climbing right turn to 5900 direct STANFIELD VORTAC and hold. Continue climb in hold to 5900. |
| NA Circling NA for Cat C and D northwest of Rwy 5-23. Autopilot coupled approach NA below 1650. DME from TFD VORTAC. Simultaneous reception of I-CGZ and TFD DME required. For inop ALS, increase S-LOC 5 Cat C/D visibility to 1 SM. |                                                                                             |                                                                                                                                   |

|                            |                                          |                                 |
|----------------------------|------------------------------------------|---------------------------------|
| AWOS-3PT<br><b>132.175</b> | ALBUQUERQUE CENTER<br><b>125.4 269.3</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|----------------------------|------------------------------------------|---------------------------------|

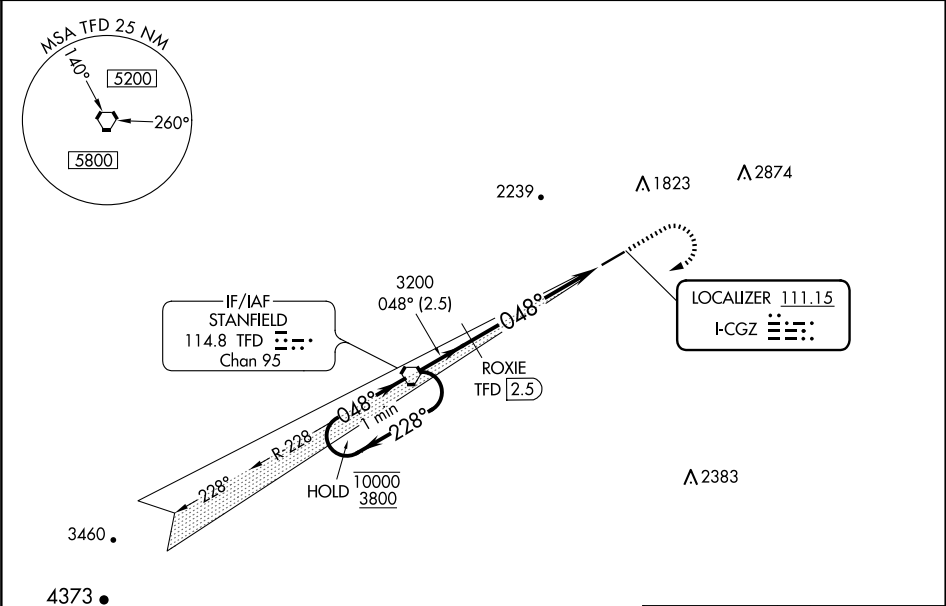
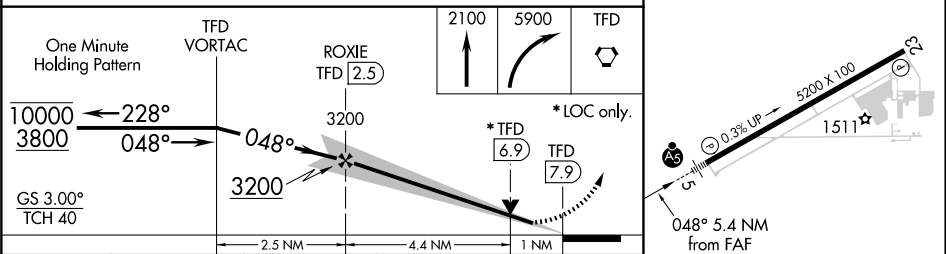
|                                                                                    |                        |                            |                            |
|------------------------------------------------------------------------------------|------------------------|----------------------------|----------------------------|
| ELEV 1464                                                                          |                        | TDZE 1458                  |                            |
|  |                        |                            |                            |
| One Minute Holding Pattern                                                         | TFD VORTAC             | ROXIE TFD 2.5              | TFD                        |
| 10000 3800                                                                         | 228° 048°              | 3200                       | 2100 5900 TFD              |
| GS 3.00° TCH 40                                                                    | 2.5 NM                 | 4.4 NM                     | 1 NM                       |
| CATEGORY                                                                           | A                      | B                          | C                          |
| S-ILS 5                                                                            | 1708-1/2 250 (300-1/2) |                            |                            |
| S-LOC 5                                                                            | 1800-1/2 342 (400-1/2) | 1800-5/8 342 (400-5/8)     |                            |
| CIRCLING                                                                           | 1960-1 496 (500-1)     | 1960-1 1/2 496 (500-1 1/2) | 2260-2 1/2 796 (800-2 1/2) |

SW-4, 17 APR 2025 to 15 MAY 2025

SW-4, 17 APR 2025 to 15 MAY 2025