

APP CRS
291°

Rwy Idg
Sfc Elev
Apt Elev

N/A
824
732

COPTER RNAV (GPS) 291°

INDIANAPOLIS DOWNTOWN (8A4)

RNP APCH - GPS

NA


Limit final and missed approach to 70 KIAS. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase MDA 40 feet. Activate High Intensity Pad Lights-CTAF.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct VHP VORTAC and hold.

AWOS-3
135.525

INDIANAPOLIS APP CON
125.275 317.8

UNICOM
123.05 (CTAF) 0

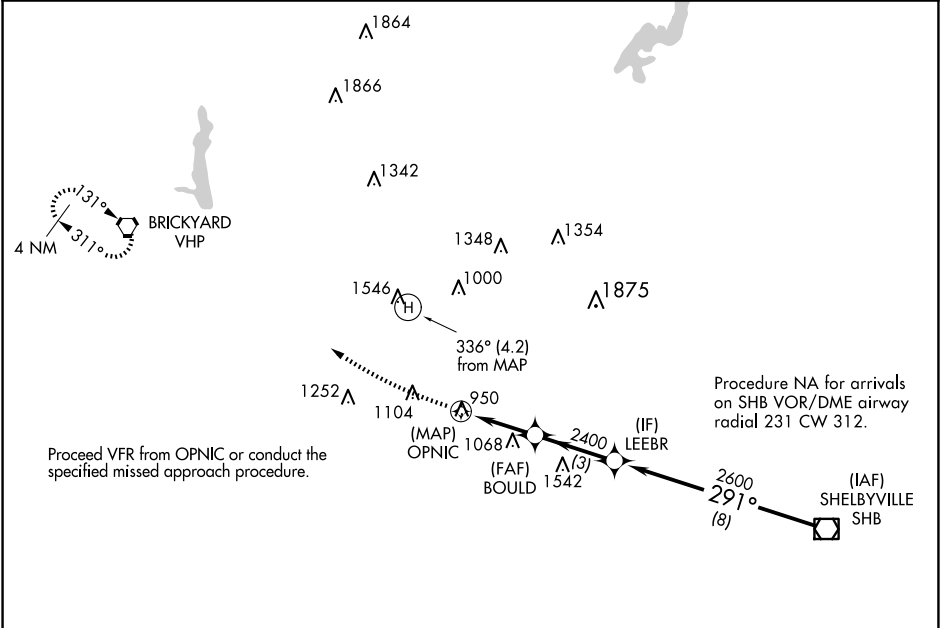

CAUTION: Helipoint located in area of numerous lighted and unlighted obstructions.

ELEV 732 SFC 824

336° 4.2 NM from MAP

(H)

(MAP) OPNIC

291°

MSA OPNIC 25 NM

3100

1500 3000 VHP

Proceed VFR from MAP

OPNIC

BOULD

LEEBR

SHB VOR/DME

291° 2600

2400

2.8 NM 3 NM 8 NM

CATEGORY

LNNAV MDA

COPTER

1340-¾ 516 (600-¾)

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025