

WAAS CH 78438 W28A	APP CRS 280°	Rwy Idg 5001 TDZE 197 Apt Elev 197
--	------------------------	---

APP CRS
280°

Rwy Idg	500
TDZE	197
Apt Elev	197

RNAV (GPS) RWY 28

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

T
A NA


Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Claxton altimeter setting; when not received, use Vidalia altimeter setting and increase LPV DA to 500, LNAV/VNAV DA to 533, increase all MDA 20 feet, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility ½ mile and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct LOTTS and hold.

AWOS-3PT
120.3



CWV AWOS-3
120.075

JACKSONVILLE CENTER
132.925 363.2

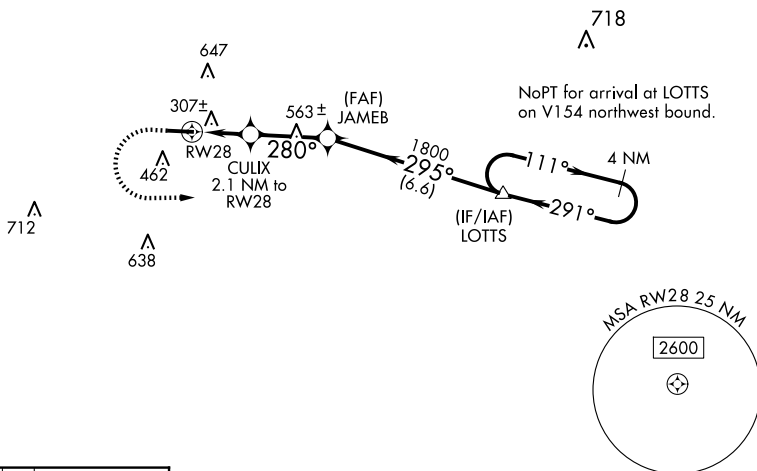UNICOM
123.0 (CTAF) 

ELEV 197

TDZE 197

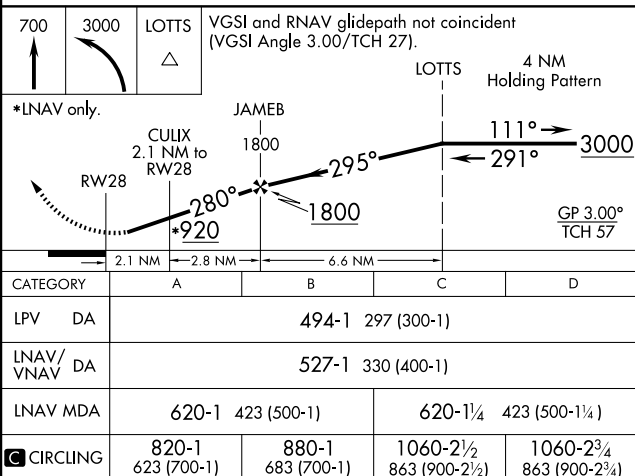

MIRL Rwy 10-28 **L**
REIL Rwy 10 **L**

METTER, GEORGIA
Amdt 1 26MAY16

JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)
32°22'N-82°05'W **BNIAV (GPS) RWY 29**

RNAV (GPS) RWY 28