

LOC I-AEG	APP CRS	Rwy Idg	7398
110.1	215°	TDZE	5817
		Apt Elev	5837

ILS or LOC RWY 22

DOUBLE EAGLE II (A/E/G)

⚠


NA

When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase all DA 94 feet, increase all MDA 100 feet, and increase visibility S-LOC 22 Cats C/D ¼ mile, Circling Cats C/D ½ mile. For inop MALSR when using Albuquerque Intl Support altimeter setting, increase visibility S-ILS 22 all Cats ¾ mile.

MALSR

MISSED APPROACH: Climb to 6500 then climbing right turn 7700 direct DUDLE LOM and hold.

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON	CLNC DEL
119.025	127.4 253.5	120.15 (CTAF) 0	121.625	124.8 (When twr closed)

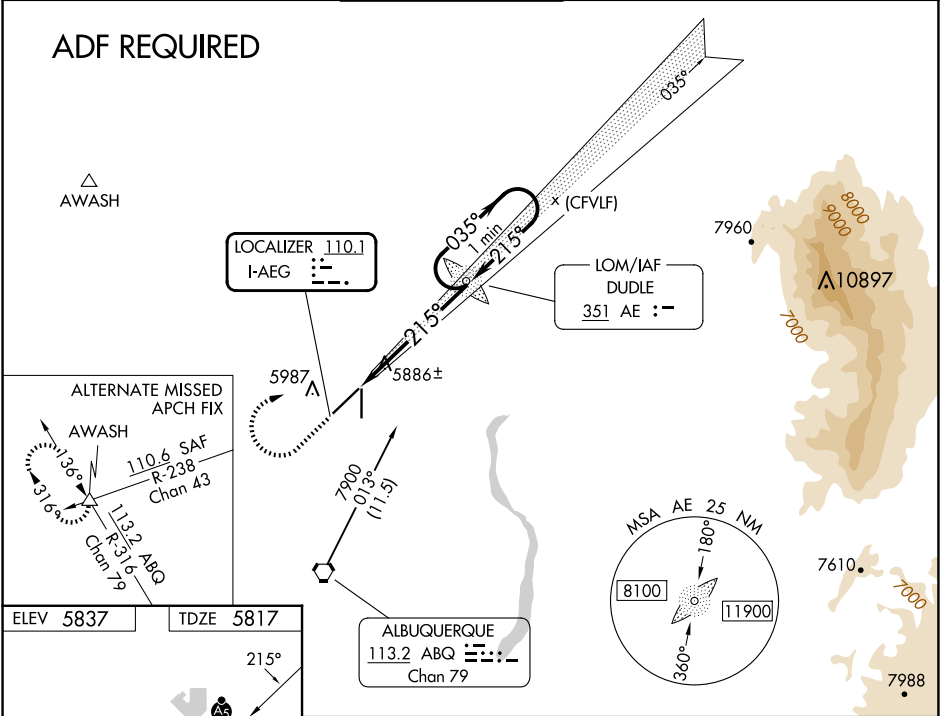

6500		7700	AE	AE LOM		One Minute Holding Pattern	
				7629			
				035°		7700	
				215°		7700	
				GS 3.00°		TCH 55	
				5.5 NM			
CATEGORY	A		B		C		D
S-ILS 22	6017-½		200 (200-½)				
S-LOC 22	6140-½		323 (400-½)				
☒ CIRCLING	6400-1		563 (600-1)		6420-1½		6640-2½
					583 (600-1½)		803 (900-2½)