


WAAS CH 56339 W04A	APP CRS 035°	Rwy Idg 7398 TDZE 5837 Apt Elev 5837
--	------------------------	---

RNAV (GPS) RWY 4
DOUBLE EAGLE II (A/E/G)


⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase LPV DA to 6131 feet and LNAV/VNAV DA to 6384 feet, increase all MDA 100 feet, and increase LPV all Cats visibility 1/8 mile, LNAV/VNAV all Cats visibility 3/8 mile, LNAV visibility Cat C/D 1/4 mile, and Circling visibility Cats C/D 1/2 mile. Baro-VNAV and VDP NA when using Albuquerque Intl Support altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 46°C (114°F).

MISSED APPROACH: Climb to 6300 then climbing left turn to 8600 direct EYIPE and hold.

ATIS 119.025	ALBUQUERQUE APP CON 127.4 253.5	DOUBLE EAGLE II TOWER ★ 120.15 (CTAF) 0	GND CON 121.625	CLNC DEL 124.8 (When twr closed)
------------------------	---	---	---------------------------	---

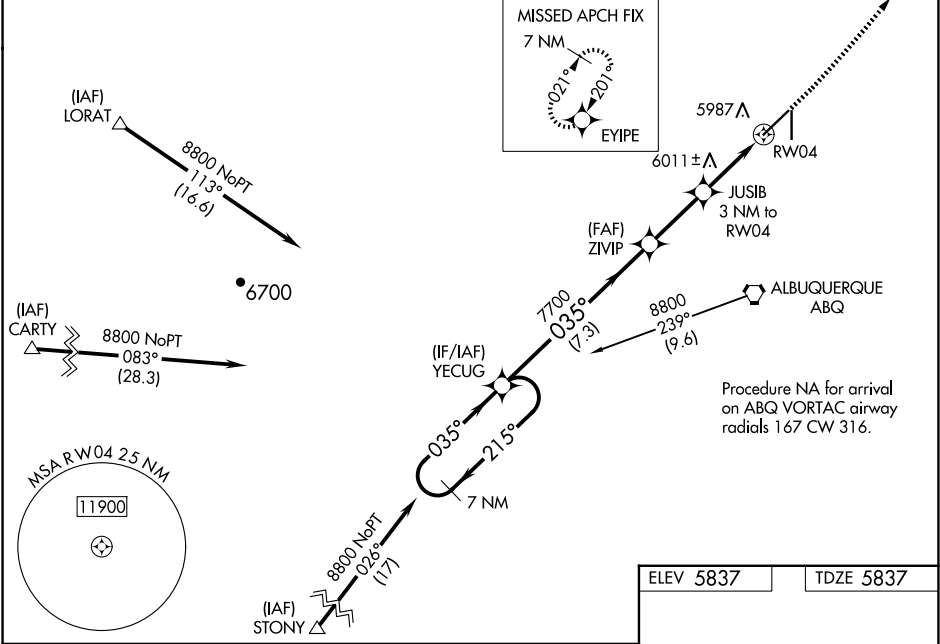

7 NM Holding Pattern		YECUG	ZIVIP	JUSIB	3 NM to RWY04	*1.3 NM to RWY04	RWY04
8800		215°	035°	035°	7700	*6840	
GP 3.00° TCH 55							
7.3 NM		2.7 NM	1.7 NM	1.3 NM			
CATEGORY		A	B	C	D		
LPV DA		6037-3/4		200 (200-3/4)			
LNAV/VNAV DA		6290-1 1/2		453 (500-1 1/2)			
LNAV MDA		6300-1	463 (500-1)	6300-1 3/8	463 (500-1 3/8)		
CIRCLING		6400-1	563 (600-1)	6420-1 1/2 583 (600-1 1/2)	6640-2 1/2 803 (900-2 1/2)		

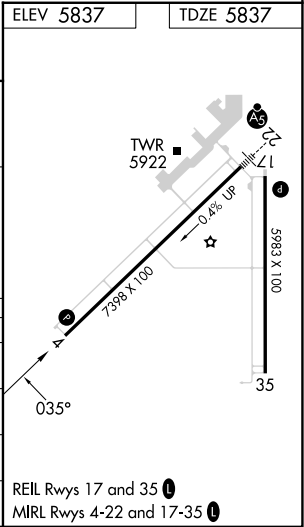

SW-1, 17 APR 2025 to 15 MAY 2025

SW-1, 17 APR 2025 to 15 MAY 2025