WAAS	APP CRS	Rwy Idg	4605
CH 53608	173°	TDZE	1827
W17A		Apt Elev	1827

RNAV (GPS) RWY 17
CURTIS FLD (BBD)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using JCT altimeter setting. When local altimeter setting not received, use JCT altimeter setting: increase LPV DA to 2144 feet; increase LNAV/VNAV DA to 2194 feet; increase all MDAs 120 feet and LNAV visibility Cat C ⅜ SM.

MISSED APPROACH: Climb to 4000 direct JENEV and hold.

AWOS-3	HOUSTON CENTER	UNICOM
118.375	132.35 317.5	122.8 (CTAF) L

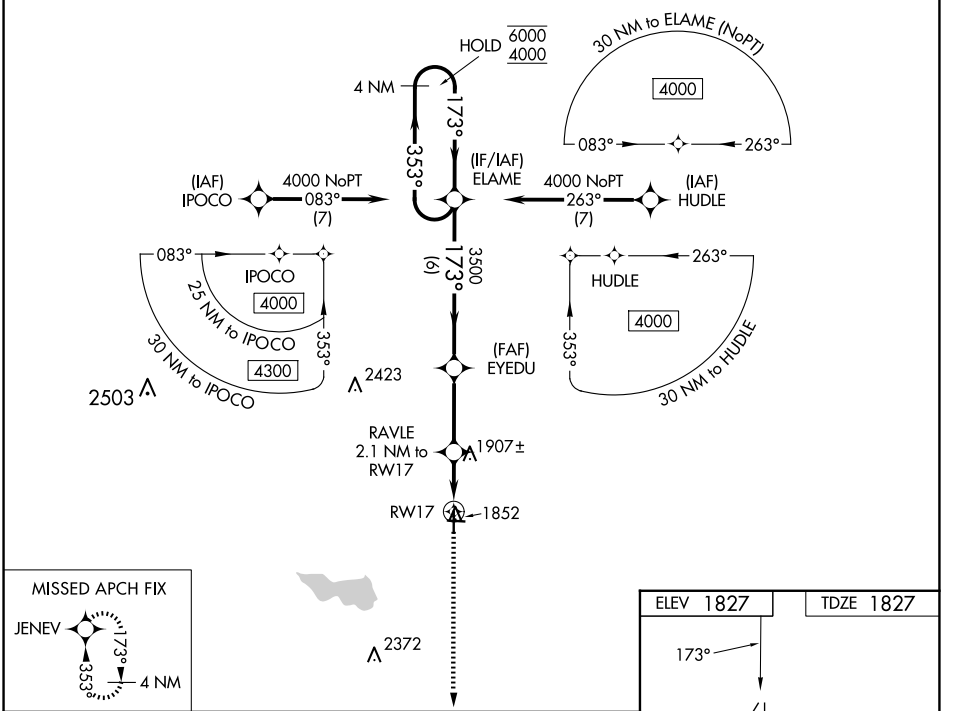

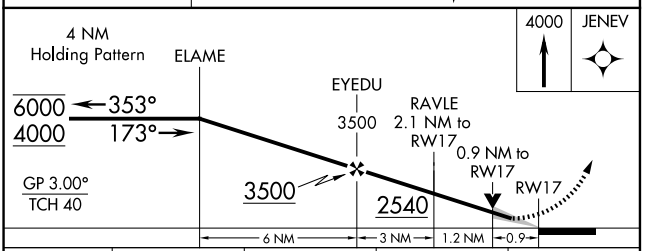

CATEGORY	A	B	C	D
LPV DA	2027-1	200 (200-1)		NA
LNAV/VNAV DA	2077-1	250 (300-1)		NA
LNAV MDA	2160-1	333 (400-1)		NA

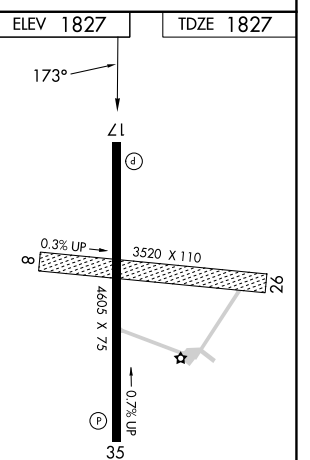

SC-3, 17 APR 2025 to 15 MAY 2025
SC-3, 17 APR 2025 to 15 MAY 2025