
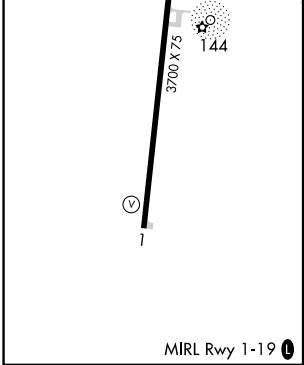


⚠ Rwy 19 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.

⚠ NA Use Kingstree altimeter setting, when not received, use Florence altimeter setting and increase all MDAs 40 feet, increase LNAV Cat B visibility ¼ SM and Cat C visibility ½ SM, increase Circling Cats B/C visibility ¼ SM. Straight-in Rwy 19 NA at night.

MISSED APPROACH:
Climb to 2000 direct
YUBUD and hold.

CKI AWOS-3 124.775	FLORENCE APP CON★ 135.25 316.15	CTAF 122.9
-----------------------	------------------------------------	---------------

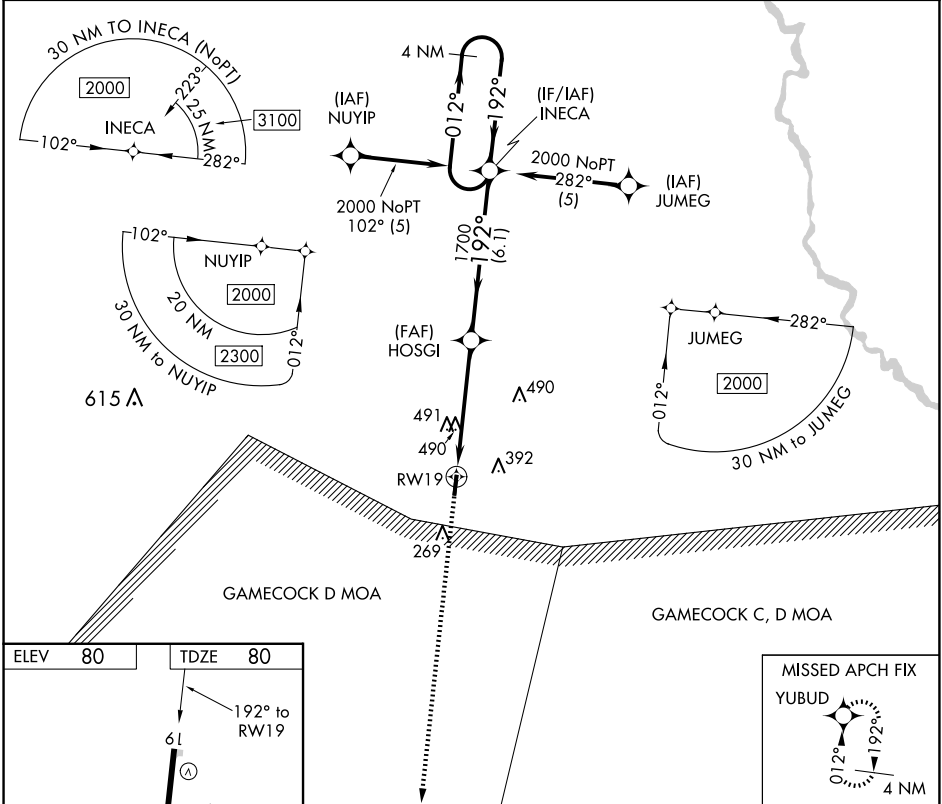

2000	YUBUD	Visual Segment - Obstacles.		INECA	4 NM
		HOSGI		Holding Pattern	
		RW19	1700	012°	2000
		4.9 NM	6.1 NM	192°	
CATEGORY	A	B	C	D	
LNAV MDA	820-1	740 (800-1)	820-2 740 (800-2)	NA	
CIRCLING	820-1 740 (800-1)	880-1 800 (800-1)	880-2¼ 800 (800-2¼)	NA	