

WAAS

CH 99743

W06A

APP CRS

060°

Rwy Idg

5509

TDZE

861

Apt Elev

882

RNAV (GPS) RWY 6

ATLANTA SPEEDWAY (HMP)

RNP APCH.


▽

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 2600 direct YEBUT and hold.

AWOS-3 124.825	ATLANTA APP CON 128.575 343.675	CLNC DEL 128.575 343.675	UNICOM 122.725 (CTAF) ①
-------------------	------------------------------------	-----------------------------	----------------------------

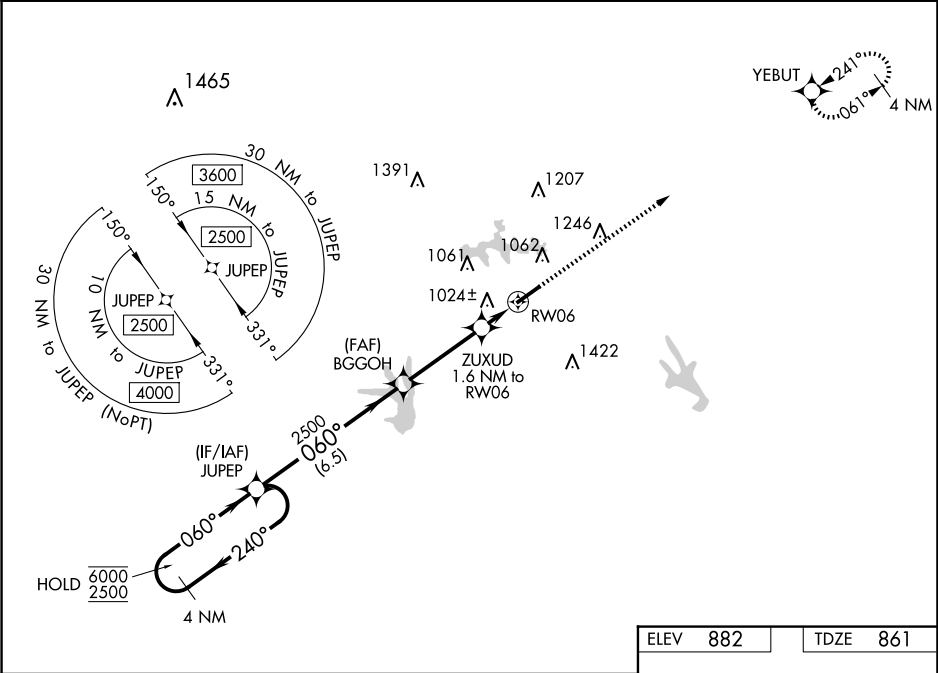

4 NM Holding Pattern

GP 3.00° TCH 44

6000 2500

240° 060°

2500

060°

2500

6.5 NM 3.4 NM 1.6 NM

2600

YEBUT

CATEGORY	A	B	C	D
LPV DA	1061-¾		200 (200-¾)	
LNAV/VNAV DA	1185-1		324 (400-1)	
LNAV MDA	1280-1	419 (400-1)	1280-1½	419 (400-1½)
CIRCLING	1380-1 498 (500-1)	1400-1 518 (600-1)	1700-2½ 818 (900-2½)	1740-2¾ 858 (900-2¾)

ELEV 882

TDZE 861

REIL Rwy 6 and 24 ①

MIRL Rwy 6-24 ①

5509 X 100

0.5% UP

060°