


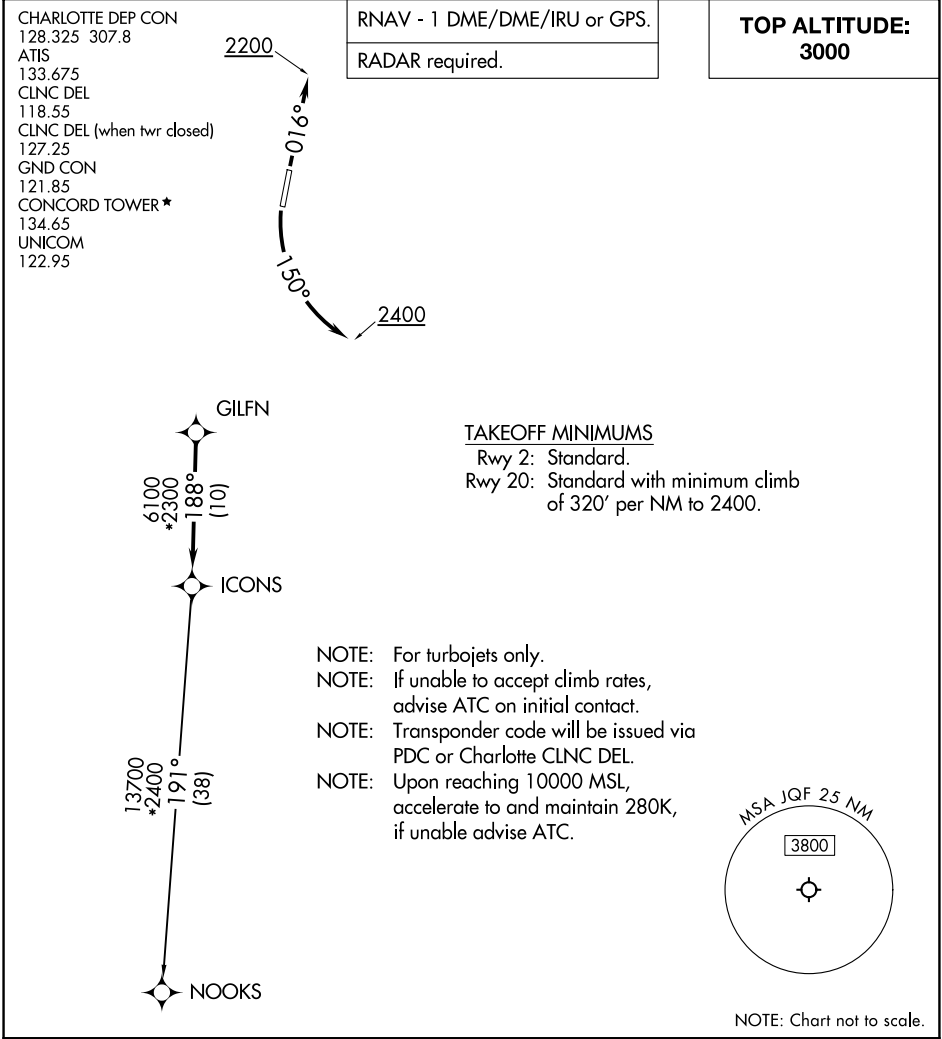

TAKEOFF MINIMUMS

Rwy 2: Standard.

Rwy 20: Standard with minimum climb
of 320' per NM to 2400.

NOTE: For turbojets only.

NOTE: If unable to accept climb rates,
advise ATC on initial contact.

NOTE: Transponder code will be issued via
PDC or Charlotte CLNC DEL.

NOTE: Upon reaching 10000 MSL,
accelerate to and maintain 280K,
if unable advise ATC.

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 2: Climb on heading 016° to 2200, then on heading
assigned by ATC, thence. . . .

TAKEOFF RUNWAY 20: Climbing left turn heading 150° to 2400, then on
heading assigned by ATC, thence. . . .

. . . .on RADAR vectors to GILFN, then on track 188° to ICONS. Then on NOOKS
Transition. Maintain 3000, expect filed altitude within 10 minutes after departure.

NOOKS TRANSITION (ICONS5.NOOKS)

SE-2, 17 APR 2025 to 15 MAY 2025

SE-2, 17 APR 2025 to 15 MAY 2025