

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>62937</b><br><b>W09A</b> | APP CRS<br><b>091°</b> | Rwy Idg<br>TDZE <b>735</b><br>Apt Elev <b>738</b> | <b>5001</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|


# RNAV (GPS) RWY 9

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).  
DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility 1/8 mile and Circling Cats C/D visibility 1/4 mile. Baro-VNAV and VDP NA when using Champaign Urbana altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

**MISSED APPROACH:**  
Climb to 3000 direct  
MEDLE and hold.

|                          |                                             |                                 |
|--------------------------|---------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.025</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|--------------------------|---------------------------------------------|---------------------------------|

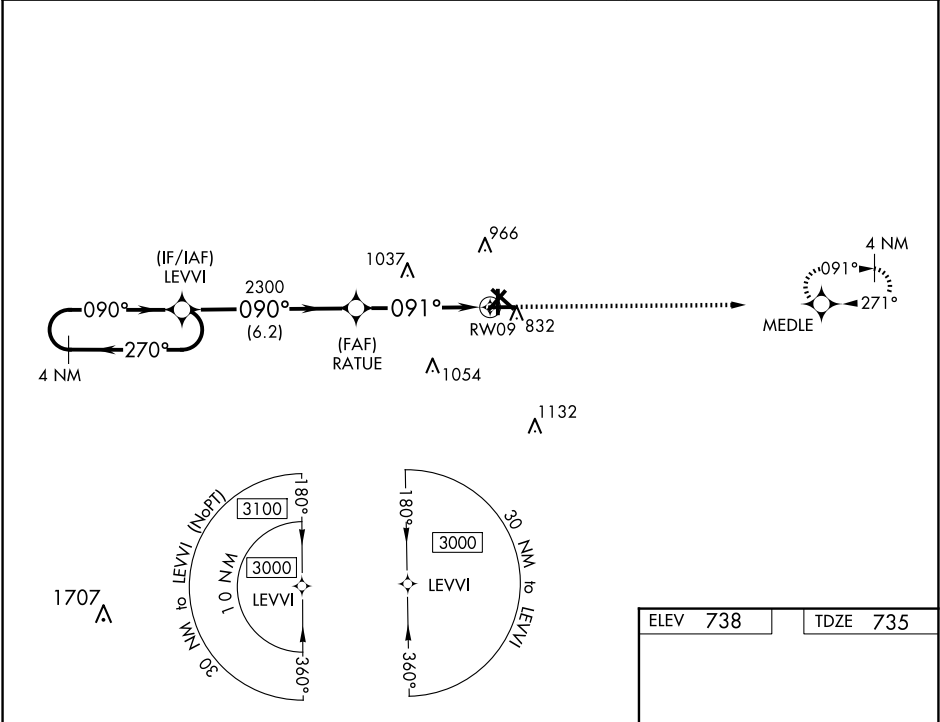

|                      |                    |        |                                           |                 |
|----------------------|--------------------|--------|-------------------------------------------|-----------------|
| 4 NM Holding Pattern |                    | LEVVI  | 3000                                      | MEDLE           |
| GP 3.00° TCH 40      |                    | RATUE  | 2300                                      | *1.6 NM to RW09 |
| 2300                 |                    | 091°   | RW09                                      | *LNAV only.     |
| 6.2 NM               |                    | 3.2 NM | 1.6 NM                                    |                 |
| CATEGORY             | A                  | B      | C                                         | D               |
| LPV DA               | 985-1              |        | 250 (300-1)                               |                 |
| LNAV/VNAV DA         | 1167-1½            |        | 432 (500-1½)                              |                 |
| LNAV MDA             | 1280-1 545 (600-1) |        | 1280-1½ 545 (600-1½)                      |                 |
| CIRCLING             | 1280-1 542 (600-1) |        | 1380-1¾ 642 (700-1¾) 1420-2¼ 682 (700-2¼) |                 |

