

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>78044</b><br><b>W23A</b> | APP CRS<br><b>228°</b> | Rwy ldg<br>TDZE<br>Apt Elev | <b>5564</b><br><b>1576</b><br><b>1576</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 23

COOLIDGE MUNI (P08)

|                                                                                                                                                   |                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH-GPS.                                                                                                                                     | MISSED APPROACH: Climb to 2100 then climbing left turn to 3900 direct TOTEC and hold. |
| <div><div>▼</div><div>▲</div></div> Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. |                                                                                       |

|                           |                                          |                                   |
|---------------------------|------------------------------------------|-----------------------------------|
| AWOS-3PT<br><b>119.35</b> | ALBUQUERQUE CENTER<br><b>125.4 269.3</b> | UNICOM<br><b>123.075 (CTAF) 1</b> |
|---------------------------|------------------------------------------|-----------------------------------|

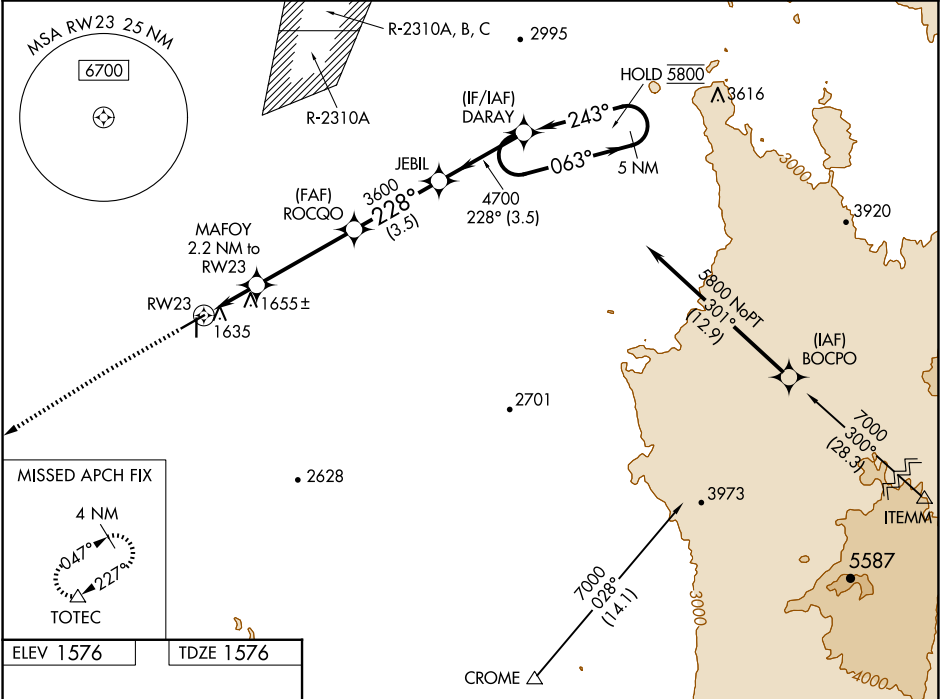


Diagram illustrating the approach path for RW23. The path is defined by a bearing of 228° to RW23. Key distances and slopes are indicated: 5564 x 150, 0.5% UP, and 3872 x 75. The path is shown as a series of connected segments with a final 35° turn.

REIL Rwy 5 and 23  
 MRL Rwy 5-23 and 17-35

Diagram illustrating the approach path for RW23. The path is defined by a bearing of 228° to RW23. Key distances and slopes are indicated: 5564 x 150, 0.5% UP, and 3872 x 75. The path is shown as a series of connected segments with a final 35° turn.

| CATEGORY  |     | A                  |  | B |  | C  |  | D |  |
|-----------|-----|--------------------|--|---|--|----|--|---|--|
| LPV       | DA  | 1826-¾ 250 (300-¾) |  |   |  | NA |  |   |  |
| LNAV/VNAV | DA  | 1826-¾ 250 (300-¾) |  |   |  | NA |  |   |  |
| LNAV      | MDA | 1920-1 344 (400-1) |  |   |  | NA |  |   |  |
| CIRCLING  |     | 2100-1 524 (600-1) |  |   |  | NA |  |   |  |