

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>50542</b><br><b>W06A</b> | APP CRS<br><b>055°</b> | Rwy Idg <b>4494</b><br>TDZE <b>45</b><br>Apt Elev <b>45</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 6  
WAINWRIGHT (AWI) (PAWI)


|                 |  |
|-----------------|--|
| RNP APCH - GPS. |  |
|-----------------|--|





For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

**MISSED APPROACH:** Climb to 4000 direct MEXIW and hold, continue climb-in-hold to 4000.

|                         |                                         |                              |                        |
|-------------------------|-----------------------------------------|------------------------------|------------------------|
| ASOS-3<br><b>132.25</b> | ANCHORAGE CENTER<br><b>135.3 239.25</b> | BARROW RADIO<br><b>122.5</b> | CTAF<br><b>122.8 0</b> |
|-------------------------|-----------------------------------------|------------------------------|------------------------|

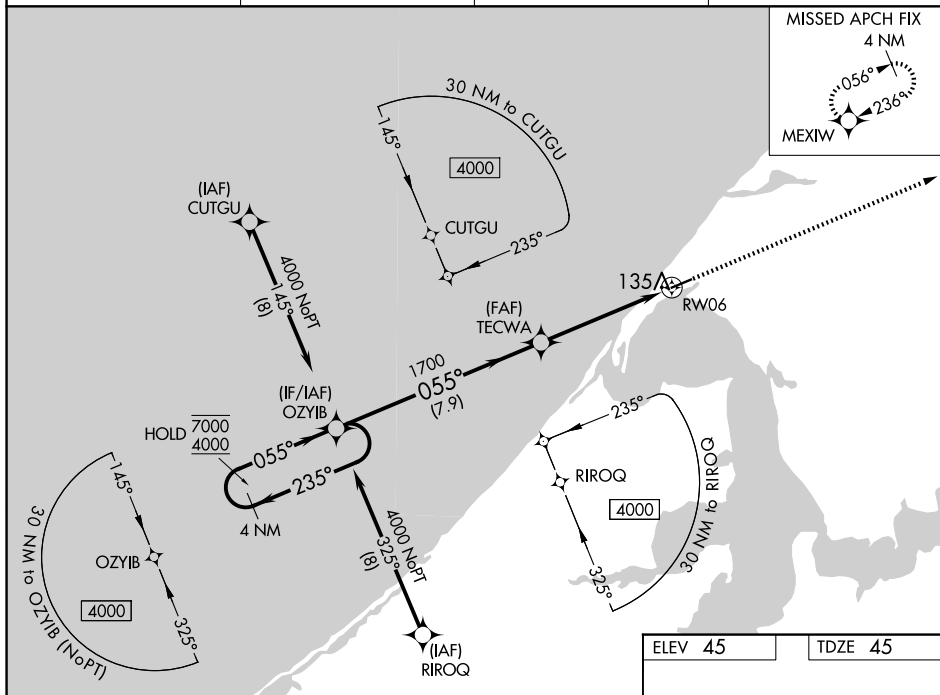

|         |  |         |
|---------|--|---------|
| ELEV 45 |  | TDZE 45 |
|---------|--|---------|

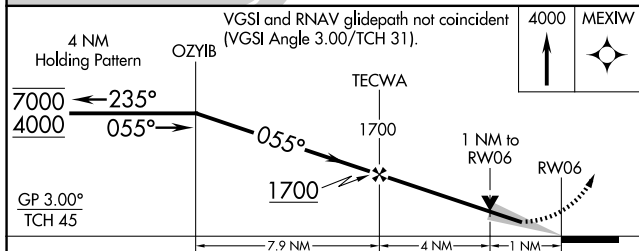

| CATEGORY                                                                                   |     | A                    | B                    | C                      | D                    |
|--------------------------------------------------------------------------------------------|-----|----------------------|----------------------|------------------------|----------------------|
| LPV                                                                                        | DA  | 295-1 250 (300-1)    |                      |                        |                      |
| LNAV/<br>VNAV                                                                              | DA  | 316-1 271 (300-1)    |                      |                        |                      |
| LNAV                                                                                       | MDA | 400-1 355 (400-1)    |                      |                        |                      |
|  CIRCLING |     | 460-1<br>415 (500-1) | 500-1<br>455 (500-1) | 500-1½<br>455 (500-1½) | 600-2<br>555 (600-2) |