

RNAV (GPS) RWY 24

GEORGE DOWNER (AIV)

APP CRS 244°	Rwy Idg 5001
	TDZE 150
	Apt Elev 150


NA DME/DME RNP-0.3 NA. Use Tuscaloosa altimeter setting; when not received, use Columbus/W Point/Starkville altimeter setting and increase all MDAs 20 feet, and Circling Cat C visibility ¼ SM. Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3000 direct ZESLO and hold.


TCL ASOS
132.825

COLUMBUS APP CON
135.6 323.275

UNICOM
122.8 (CTAF) 0

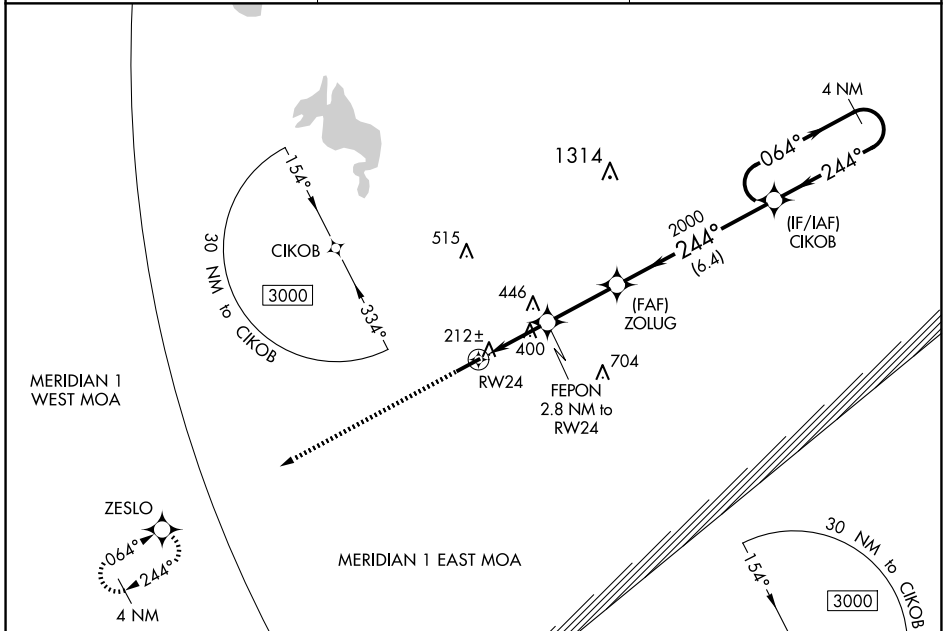

ELEV 150	TDZE 150
----------	----------

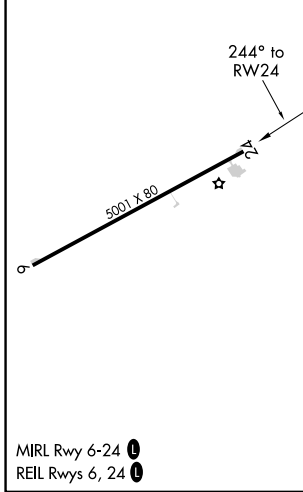

Visual Segment - Obstacles.	3000	ZESLO	ZOLUG	CIKOB	4 NM Holding Pattern
	RW24	FEPON 2.8 NM to RW24	ZOLUG 2000	CIKOB 3000	
	2.8 NM	2.8 NM	6.4 NM		
CATEGORY	A	B	C	D	
LNAV MDA	740-1	590 (600-1)	740-1¾	590 (600-1¾)	
C CIRCLING	740-1	590 (600-1)	820-1¾ 670 (700-1¾)	900-2½ 750 (800-2½)	

SE-4, 17 APR 2025 to 15 MAY 2025

SE-4, 17 APR 2025 to 15 MAY 2025