

APP CRS  
168°

Rwy Idg  
TDZE  
Apt Elev

6004  
364  
364

RNAV (GPS) RWY 17  
MOUNT PLEASANT RGNL (OSA)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ¼ mile all Cats, LNAV visibilities ½ mile all Cats, and circling visibilities ½ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2100 direct JAVOT and hold.

|                   |                                     |                          |
|-------------------|-------------------------------------|--------------------------|
| AWOS-3<br>119.775 | FORT WORTH CENTER<br>132.025 360.75 | UNICOM<br>122.7 (CTAF) 0 |
|-------------------|-------------------------------------|--------------------------|

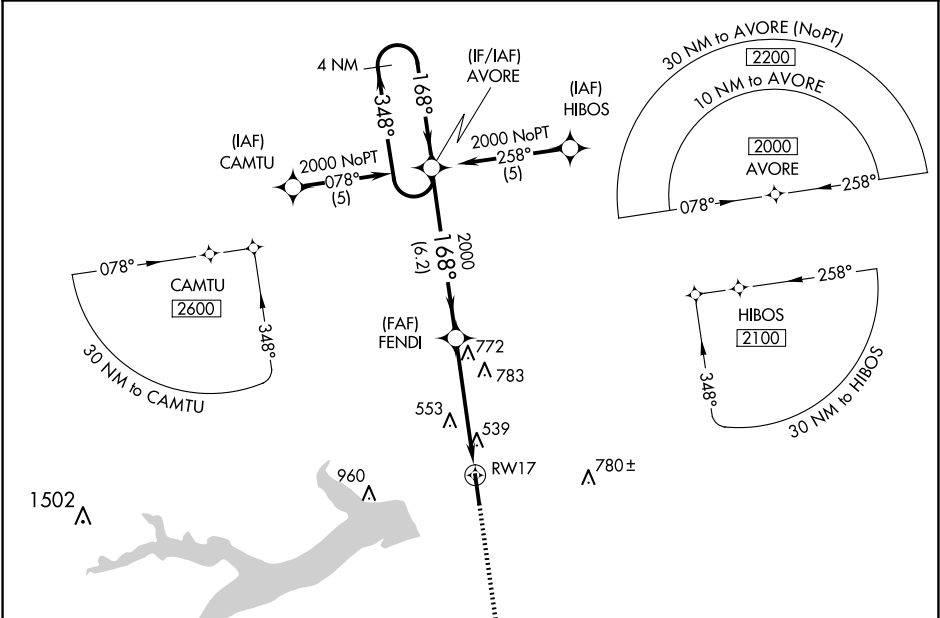

MISSED APCH FIX  
JAVOT

4 NM Holding Pattern

2100

JAVOT

2000 ← 348°

← 168°

168° →

2000

GP 3.00°  
TCH 39°

6.2 NM

2.8 NM

2.2

RWY 17

\*2.2 NM to RWY 17

\*LNAV only.

|              |                    |                    |                      |   |
|--------------|--------------------|--------------------|----------------------|---|
| CATEGORY     | A                  | B                  | C                    | D |
| LNAV/VNAV DA | 890-2 526 (600-2)  |                    |                      |   |
| LNAV MDA     | 1100-1 736 (800-1) | 1100-2 736 (800-2) | 1100-2¼ 736 (800-2¼) |   |
| CIRCLING     | 1100-1 736 (800-1) | 1100-2 736 (800-2) | 1100-2¼ 736 (800-2¼) |   |

ELEV 364

TDZE 364

168° to RWY 17

6004 X 100

0.4% UP

35

REIL Rwy 17 and 35 0

MIRL Rwy 17-35 0