

APP CRS
348°

Rwy Idg
TDZE
Apt Elev

6004
360
364

RNAV (GPS) RWY 35

MOUNT PLEASANT RGNL (OSA)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ½ mile all Cats, LNAV visibilities ¼ mile all Cats and circling visibilities ¼ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.

MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3 119.775	FORT WORTH CENTER 132.025 360.75	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

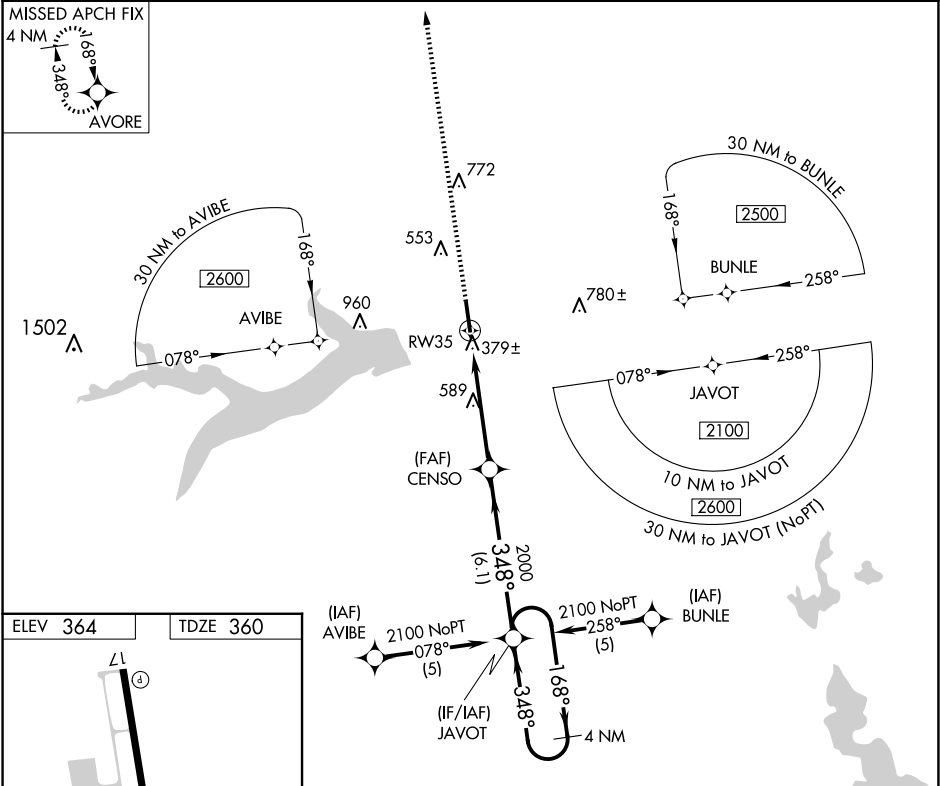

ELEV 364	TDZE 360	2000 AVORE 4 NM Holding Pattern 2100 GP 3.00° TCH 44			
35 REIL Rwy 17 and 35 MIRL Rwy 17-35		*LNAV only. RW35 *1.6 NM to RW35 CENSO JAVOT 1.6 3.4 NM 6.1 NM			
CATEGORY	A	B	C	D	
LNAV/VNAV DA	700-1¼		340 (400-1¼)		
LNAV MDA	900-1	540 (600-1)	900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)	
CIRCLING	900-1	536 (600-1)	1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)	