

WAAS CH 49004 W18A	APP CRS 175°	Rwy Idg 6610 TDZE 166 Apt Elev 166
--	------------------------	---

RNAV (GPS) RWY 18

HOUSTON EXEC (TME)


RNP APCH - GPS.

▼

Baro-VNAV NA when using David Wayne Hooks Meml altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. VDP NA when using David Wayne Hooks Meml altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use David Wayne Hooks Meml altimeter setting and increase all DA 57 feet and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cat C/D visibility ¼ mile, and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH:
Climb to 2000 direct ZUXUG and on track 203° to EBERE and hold.

ATIS 119.525	HOUSTON APP CON 123.8 257.7	EXECUTIVE TOWER ★ 126.975 (CTAF) 0	GND CON 132.075	CLNC DEL 132.075	UNICOM 122.975
------------------------	---------------------------------------	--	---------------------------	----------------------------	--------------------------

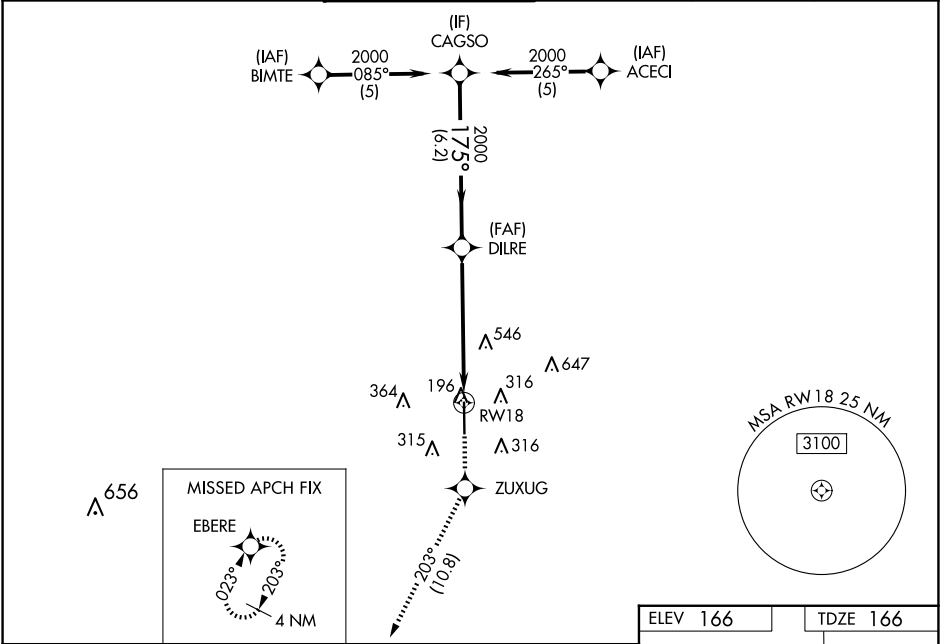

ELEV 166		TDZE 166	
2000		ZUXUG	EBERE
GP 3.00° TCH 40°		tr 203°	
6.2 NM		3.7 NM	1.8 NM
CATEGORY	A	B	C
LPV DA	416-1		250 (300-1)
LNAV/VNAV DA	708-2		542 (600-2)
LNAV MDA	780-1	614 (700-1)	780-1¾ 614 (700-1¾)
CIRCLING	820-1	654 (700-1)	860-2 694 (700-2) 1000-2¾ 834 (900-2¾)

REIL Rwys 18-36 0

MIRL Rwy 18-36 0