

WAAS CH 93817 W34A	APP CRS 342°	Rwy Idg 10000 TDZE 62 Apt Elev 69
--	------------------------	--


RNAV (GPS) RWY 34

NORTHWEST FLORIDA BEACHES INTL (E/C/P)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Destin altimeter setting and increase all DA 88 feet, increase all MDA 100 feet, increase LPV all Cats visibility ⅓ mile, increase LNAV/VNAV all Cats visibility ⅓ mile, and increase LNAV Cat C and D visibility ⅓ mile. Baro-VNAV and VDP NA with Destin altimeter setting.

MISSED APPROACH: Climb to 4000 direct HOSBY and on track 013° to HUUPP and hold, continue climb-in-hold to 4000.

ATIS 119.975	TYNDALL APP CON ★ 125.2 (N above 5000')	PANAMA CITY TOWER★ 118.95 (CTAF) 0	GND CON 121.65	CLNC DEL 123.75
------------------------	---	---	--------------------------	---------------------------

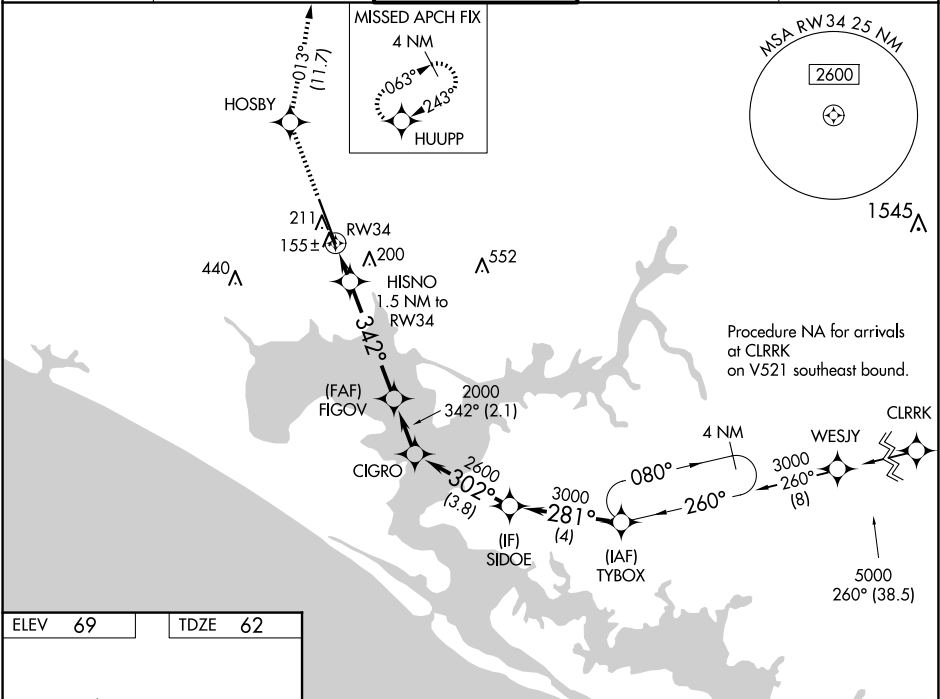

ELEV 69	TDZE 62
----------------	----------------

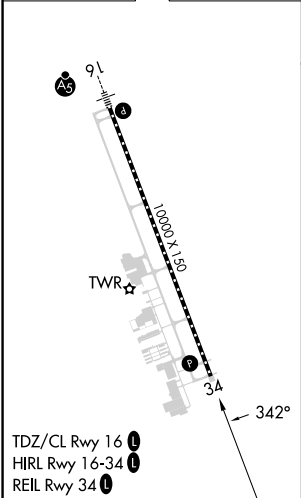

4000	HOSBY	fr 013°	HUUPP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 86).				
*LNAV only.				HISNO 1.5 NM to RW34	FIGOV 2000	CIGRO	SIDOE	3000
				*0.9 NM to RW34	342°	2600	302°	
				RW34	*580	2000		GP 3.00° TCH 55
				0.9	0.6	4.4 NM	2.1 NM	3.8 NM
CATEGORY		A		B		C		D
LPV DA				262-3 ⁴ / ₄		200 (200-3 ⁴ / ₄)		
LNAV/ VNAV		DA		344-7 ⁸ / ₈		282 (300-7 ⁸ / ₈)		
LNAV MDA				420-1		358 (400-1)		
CIRCLING		520-1		451 (500-1)		520-1½ 451 (500-1½)		620-2 551 (600-2)