

WAAS CH 69537 W34A	APP CRS 340°	Rwy Idg 3500 TDZE 1482 Apt Elev 1482
--	------------------------	---

RNAV (GPS) RWY 34

CANDO MUNI (9D7)


▼

NA


DME/DME RNP-0.3 NA. When local altimeter not received, use Devils Lake altimeter setting and increase all DA 63 feet and all MDA 80 feet. Increase LPV visibility 1/8 mile all Cats and LNAV/VNAV visibility 1/4 mile all Cats. Baro-VNAV and VDP NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (0°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 1900 then
climbing left turn to 3600
direct CAREW and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 124.2 270.3	CTAF 122.9 0
--------------------------	--	------------------------

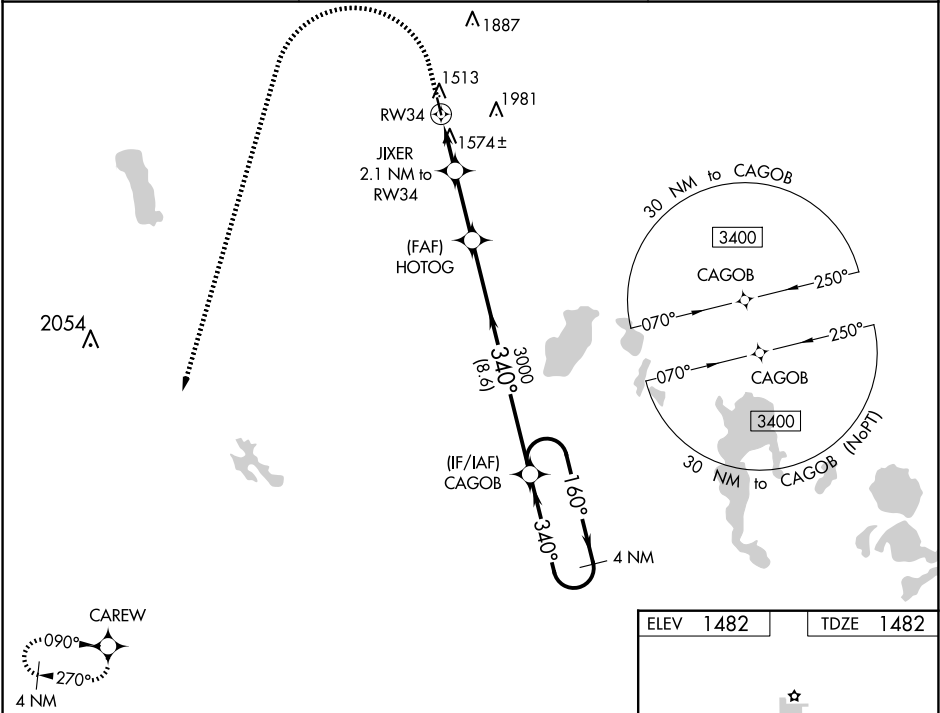

1900	3600	CAREW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).	4 NM Holding Pattern
*LNAV only.			HOTOG	
			JIXER 2.1 NM to RW34	
			*1 NM to RW34	
			3000	
			3400	
			GP 3.00° TCH 35	
			1 NM 1.1 NM 2.6 NM 8.6 NM	
CATEGORY	A	B	C	D
LPV DA	1732-1	250 (300-1)	NA	NA
LNAV/VNAV DA	1871-13/8	389 (400-13/8)	NA	NA
LNAV MDA	1840-1	358 (400-1)	NA	NA
CIRCLING	1900-1 418 (500-1)	1940-1 458 (500-1)	NA	NA

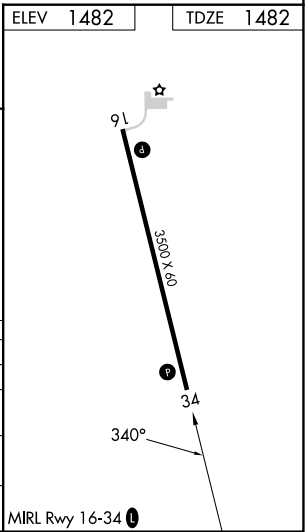

NC-1, 17 APR 2025 to 15 MAY 2025

NC-1, 17 APR 2025 to 15 MAY 2025