

WAAS CH 72815 W19A	APP CRS 193°	Rwy Idg 8000 TDZE 74 Apt Elev 75
--	------------------------	---

RNAV (GPS) RWY 19L

BRUNSWICK EXEC (BXM)

RNP APCH - GPS.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Inop table does not apply to LPV all Cats. Rwy 19L helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA with Portland altimeter setting. When local altimeter setting not received, use Portland altimeter setting: increase LPV DA to 382 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 410 feet and all visibilities ¼ SM; increase all MDA 60 feet and LNAV and Circling Cats C/D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct BAILI and hold.

AWOS-3PT 134.875	PORTLAND APP CON ★ (112°-292°) 119.75 269.35 (293°-111°) 120.4 299.2	CLNC DEL 123.65	UNICOM 122.725 (CTAF) 0
----------------------------	---	---------------------------	-----------------------------------

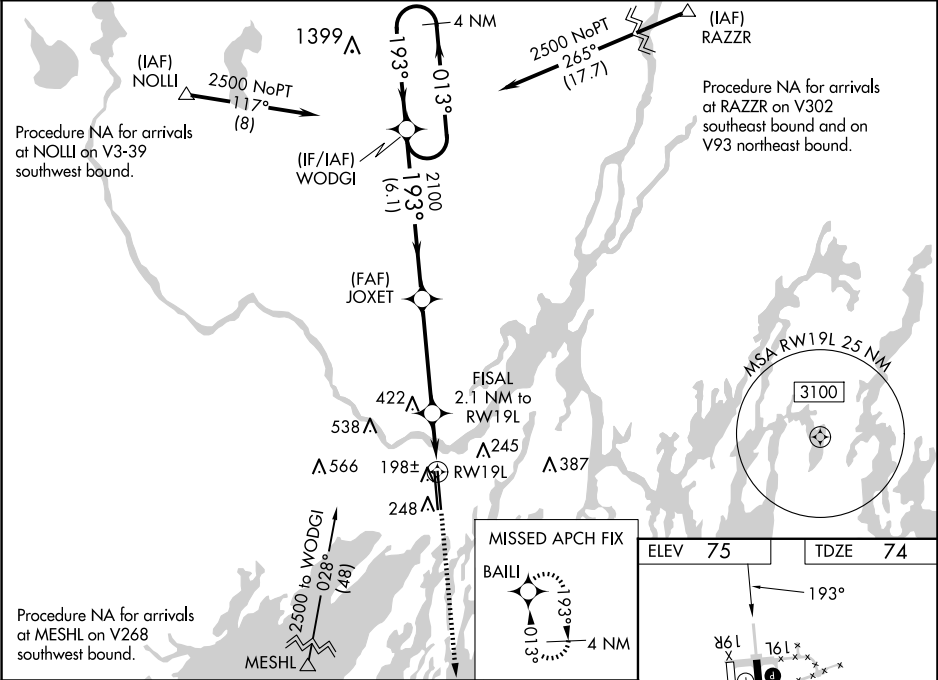

4 NM Holding Pattern		WODGI	JOXET	FISAL	BAILI
2500		2100	2100	2000	2000
GP 3.00° TCH 53		193°	193°	193°	193°
6.1 NM		4.1 NM	1 NM	1.1 NM	1.1 NM
CATEGORY	A	B	C	D	
LPV DA	331-¾		257 (300-¾)		
LNAV/VNAV DA	359-⅞		285 (300-⅞)		
LNAV MDA	460-1	386 (400-1)	460-1½	386 (400-1½)	
CIRCLING	560-1	485 (500-1)	840-2¼ 765 (800-2¼)	840-2½ 765 (800-2½)	

