

WAAS CH 65832 W18A	APP CRS 182°	Rwy Idg TDZE 239 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 18

DELTA RGNL (DRP)

RNP APCH - GPS.



▼

⚠

Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting: increase LPV DA to 507 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 668 feet and all visibilities $\frac{1}{4}$ SM; increase all MDAs 80 feet.

MISSED APPROACH: Climb to 3000 direct USUDY and hold, continue climb-in-hold to 3000.

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF) 0
-------------------------	--------------------------------------	---------------------------------

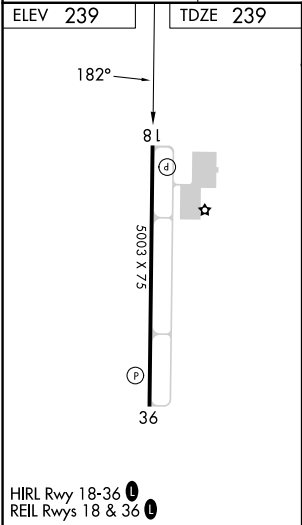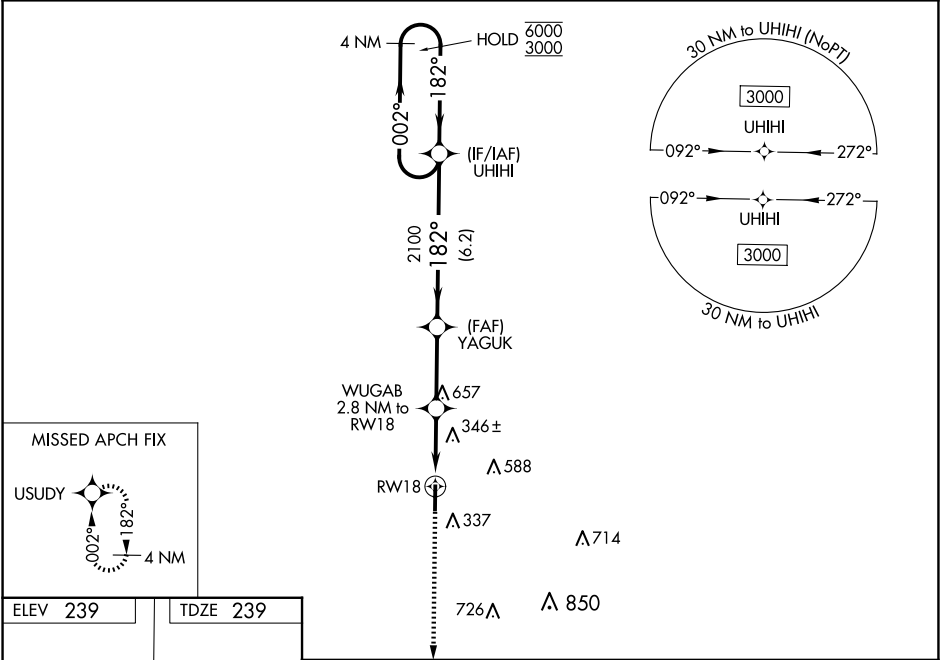

3000 USUDY		UHIHI 4 NM Holding Pattern	
YAGUK 2100		002° 182° 6000 3000	
WUGAB 2.8 NM to RWY18		GP 3.00° TCH 44	
RWY18 1 NM to RWY18			
1 NM		1.8 NM	
		2.9 NM	
		6.2 NM	
CATEGORY	A	B	C
LPV DA	439- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	NA
LNAV/VNAV DA	600-1	361 (400-1)	NA
LNAV MDA	600-1	361 (400-1)	NA
CIRCLING	760-1	521 (600-1)	NA

SC-1, 17 APR 2025 to 15 MAY 2025

SC-1, 17 APR 2025 to 15 MAY 2025