

AMARILLO, TEXAS

HI-VOR or TACAN RWY 4

VORTAC PNH 116.6 Chn 113	APCH CRS 037°	Rwy Idg 13,502 TDZE 3607 Arpt Elev 3607
--	-------------------------	--

[USAF]

RICK HUSBAND AMARILLO INTL (KAMA)

DME required


T * When ALS inop, increase CAT D vis to $1\frac{1}{4}$ miles;
CAT E vis to $1\frac{1}{2}$ miles.
** When ALS inop, increase CAT CD vis to $1\frac{1}{2}$ miles;
CAT E vis to $1\frac{3}{4}$ miles.




MISSED APPROACH: Climbing right turn to 5000 on heading 090° and PNH VORTAC R-118 to CAUDE/PNH 13 DME and hold.

ATIS 118.85 350.3	AMARILLO APP CON 119.5 307.0	AMARILLO TOWER ★ 118.3 (CTAF) 0 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	ASR
----------------------	---------------------------------	--	------------------------	----------------------------	-----

When local altimeter setting not received,
use Borger altimeter setting. _____

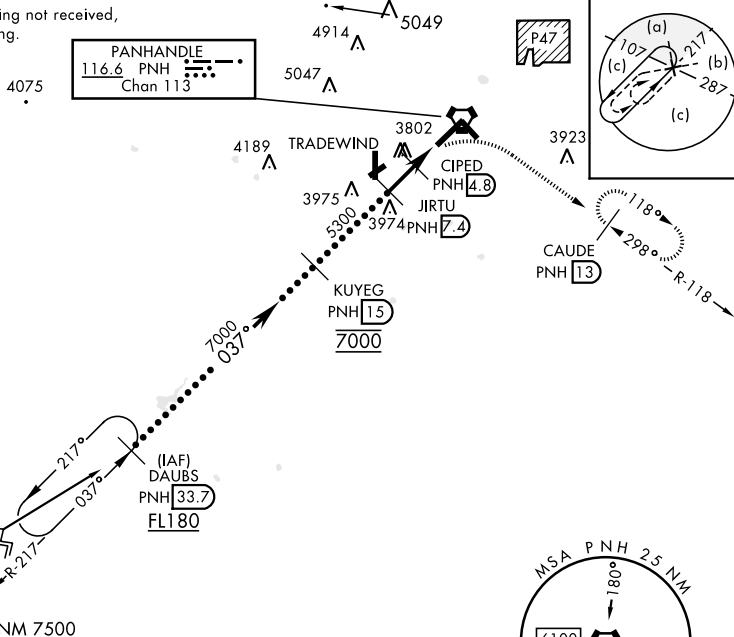


EMERG SAFE ALT 100 NM 7500

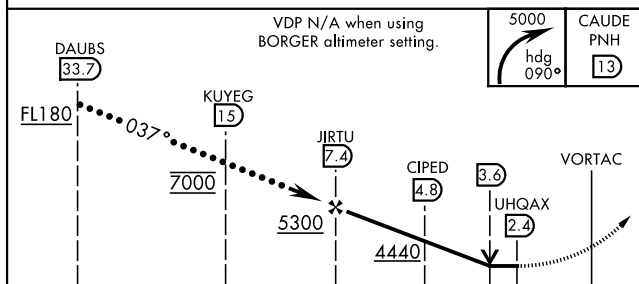

		← 2.6 NM →		← 2.4 NM →			
CATEGORY	C		D		E		
S-4 *	4040/40 433 (500-34)		4040/50 433 (500-1)				
C CIRCLING	4240-1¼ 633 (700-1¾)		4280-2¼ 673 (700-2¼)		4460-3 853 (900-3)		
BORGER ALTIMETER SETTING							
S-4 **	4200-1¼		593		(600-1¼)		
C CIRCLING	4400-2¼ 793 (900-2¼)		4440-2¾ 833 (900-2¾)		4620-3 1013 (1100-3)		

ELEV	3607	D	TDZE	3607
------	------	----------	------	------



HIRL all rwys **L**
REIL Rwy 13 **L**

AMARILLO, TEXAS

35°13'N-101°42'W

RICK HUSBAND AMARILLO INTL (KAMA)

Amdt 1A 05DEC19

HI-VOR or TACAN RWY 4