

LOC/DME I-BFL	APP CRS	Rwy Idg	7429
111.9	301°	TDZE	493
Chan 56		Apt Elev	510

ILS or LOC RWY 30R

MEADOWS FLD (BFL)

⚠


⚠

Circling NA northeast of Rwy 12L-30R. DME Required. VDP NA with Porterville altimeter setting. When local altimeter setting not received, use Porterville altimeter setting: increase DA to 790 and all visibilities to RVR 2200; increase all MDA 100 feet and visibility Cats C and D to RVR 6000. For inop ALS, increase S-LOC 30R Cat A and B visibility to RVR 5000. For inop ALS when using Porterville altimeter setting, increase S-ILS 30R all Cats visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on EHF VORTAC R-145 direct EHF VORTAC and hold, continue climb-in-hold to 3000.

ATIS	BAKERSFIELD APP CON★		BAKERSFIELD TOWER★	GND CON	UNICOM
118.6	118.8	284.625 (SOUTH)	118.9 270.3 (NORTH)	121.7	122.95
			118.1 (CTAF) 0 257.8		

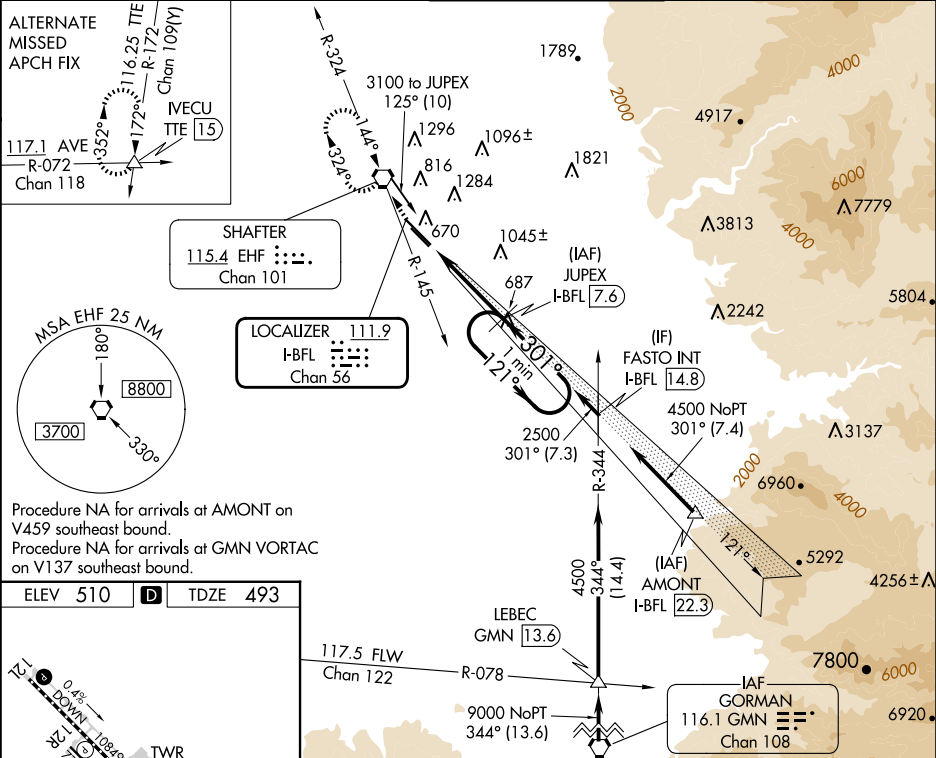

ELEV 510

D

TDZE 493

1000

3000

EHF

Use I-BFL DME when on the localizer course.

One Minute Holding Pattern

*LOC only

*I-BFL

I-BFL 1.4

I-BFL 2.6

I-BFL 7.6

2500

121°

301°

2500

GS 3.00°

TCH 51

CATEGORY	A	B	C	D
S-ILS 30R	698/18		205 (200-½)	
S-LOC 30R	940/24	447 (500-½)	940/45	447 (500-¾)
CIRCLING	960-1	450 (500-1)	960-1½ 450 (500-½)	1060-2 550 (600-2)

TDZ/CL Rwy 30R

HIRL Rwy 12L-30R

MIRL Rwy 12R-30L

REIL Rwy 12R and 30L