


APP CRS	Rwy Idg	11022
352°	TDZE	6075
	Apt Elev	6187


RNAV (RNP) Z RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)

▼ For uncompensated Baro-VNAV systems, procedure NA below -21°C (-5°F) or above 45°C (113°F). GPS required. For inop MALS increase RNP 0.15 visibility all Cats to RVR 5000. RADAR monitoring required when R-2601 in use.	MALS	MISSED APPROACH: Climb to 9000 on track 352° to ZAMLO and on track 037° to JEPMA and on track 118° to ADANE and hold.
--	------	---

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
---------------------	----------------------------------	------------------------------	------------------------	----------------------------

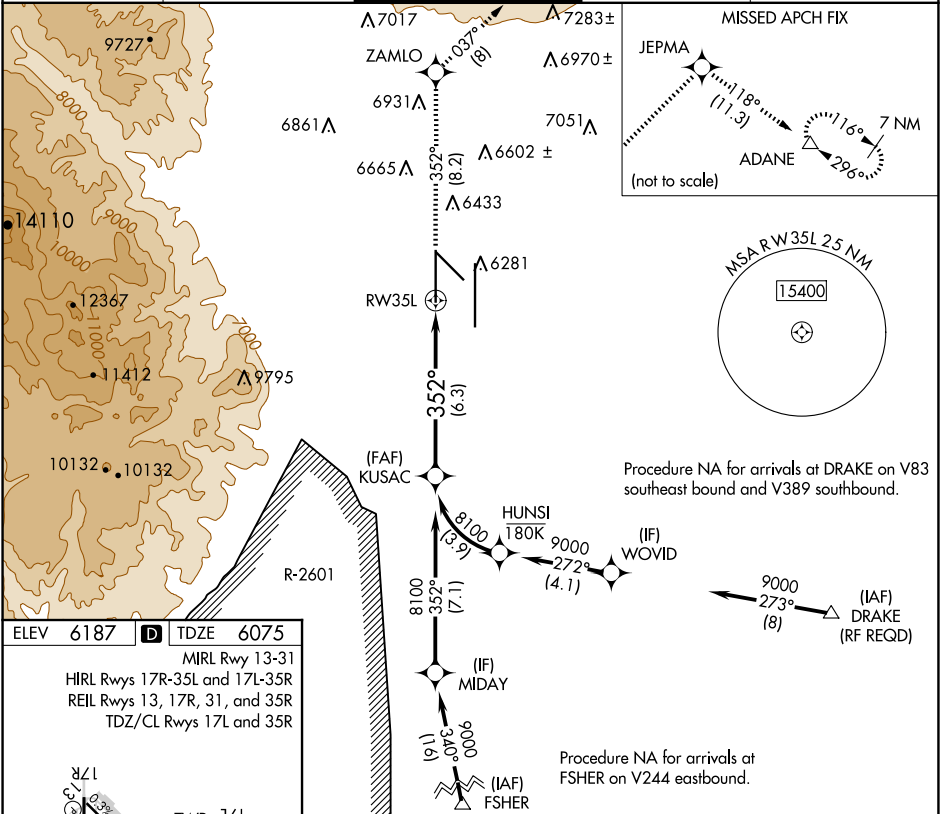

ELEV 6187	D	TDZE 6075
MIRL Rwy 13-31		
HIRL Rwy 17R-35L and 17L-35R		
REIL Rwy 13, 17R, 31, and 35R		
TDZ/CL Rwy 17L and 35R		

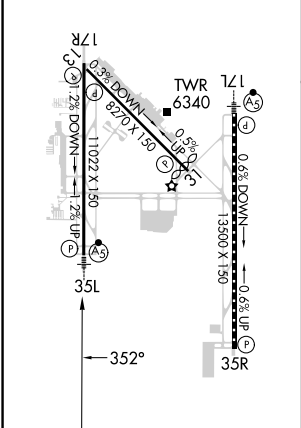

See planview for multiple IF locations.		9000	ZAMLO	tr 037°	JEPMA	tr 118°	ADANE
KUSAC		tr 352°					
8100		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).					
GP 3.00°		RW35L					
TCH 55		6.3 NM					
CATEGORY	A	B	C	D			
RNP 0.15 DA		6372/30	297 (200-5%)				
RNP 0.30 DA		6427/40	352 (300-34)				

AUTHORIZATION REQUIRED

SW-1, 15 MAY 2025 to 12 JUN 2025

SW-1, 15 MAY 2025 to 12 JUN 2025