

WAAS CH 46924 W28A	APCH CRS 276°	Rwy ldg 9003 TDZE 13 Arpt Elev 23
--------------------------	------------------	---

- (USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP APCH


* When ALS inop, increase CAT BCD to 7/8 mile.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.





MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

ATIS 124.35 290.425	APP CON/DEP CON 127.775 377.075	TOWER 125.15 (CTAF) 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 353.675	ASR/PAR
------------------------	------------------------------------	------------------------------	------------------------	-----------------------------	---------

For uncompensated
BARO-VNAV systems,
Procedure NA below
-15°C (5°F) and
above 54°C (130°F).

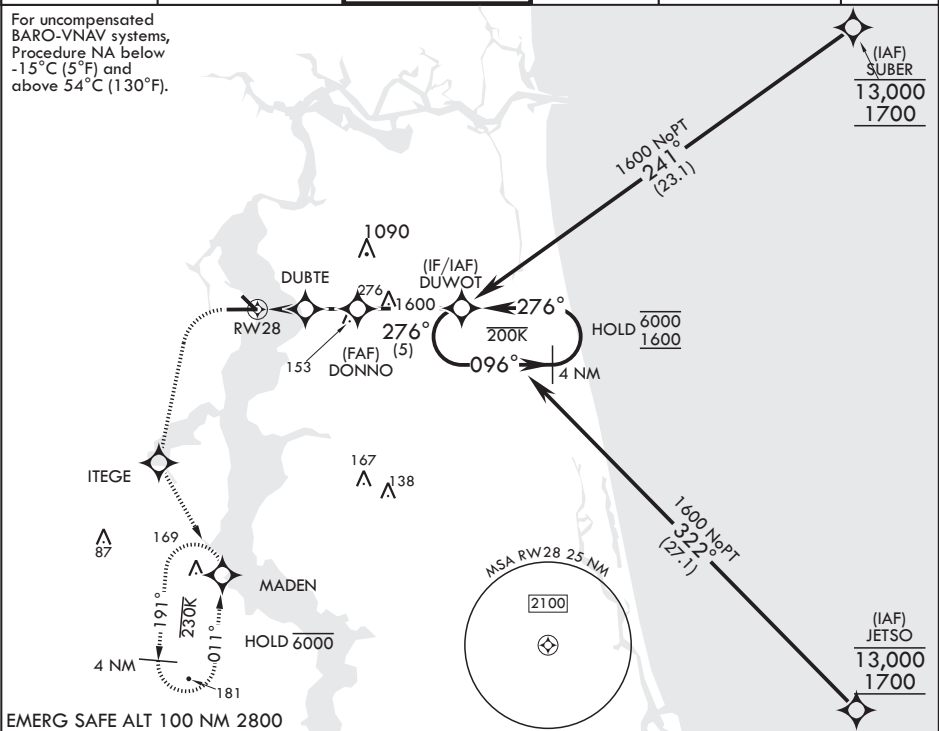

EMERG SAFE ALT 100 NM 2800

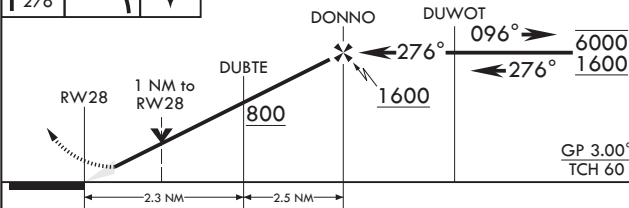

ELEV 23	TDZE 13
---------	---------

Rwy 10 ldg 8006'
Rwy 14 ldg 3244'

CATEGORY	A	B	C	D
LPV DA	213-3/4	200	(200-3/4)	
LNAV/VNAV DA*	263-3/4 250 (300-3/4)	274-3/4 261 (300-3/4)	282-3/4 269 (300-3/4)	293-3/4 280 (300-3/4)
LNAV MDA**	400-3/4 387 (400-3/4)	400-1/8 387 (400-3/4)	560-1 1/2 537 (600-1 1/2)	780-2 1/2 757 (800-2 1/2)
CIRCLING	500-1 477 (500-1)			

