

WAAS Ch 82599 W18A	APP CRS 178°	Rwy Idg 8743 TDZE 504 Apt Elev 508
--	------------------------	---



RNAV (GPS) RWY 18R
LAREDO INTL (L.R.D)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA West of Rwy 14 and 36L. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to ¾ SM, LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cats C/D/E to 1 SM.

MALSR

MISSED APPROACH:
Climb to 1000 then climbing left turn to 2500 direct ELKOS and hold.

ATIS 125.775	HOUSTON CENTER 127.8 307.2	LAREDO TOWER* 120.1(CTAF) 0 257.9	GND CON 121.8	UNICOM 122.95
------------------------	--------------------------------------	---	-------------------------	-------------------------

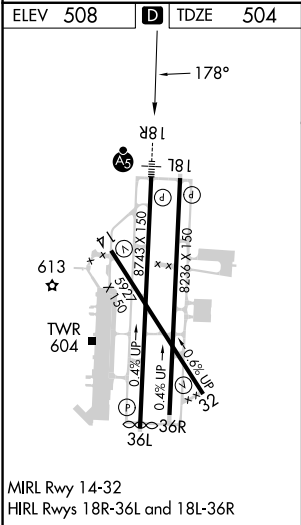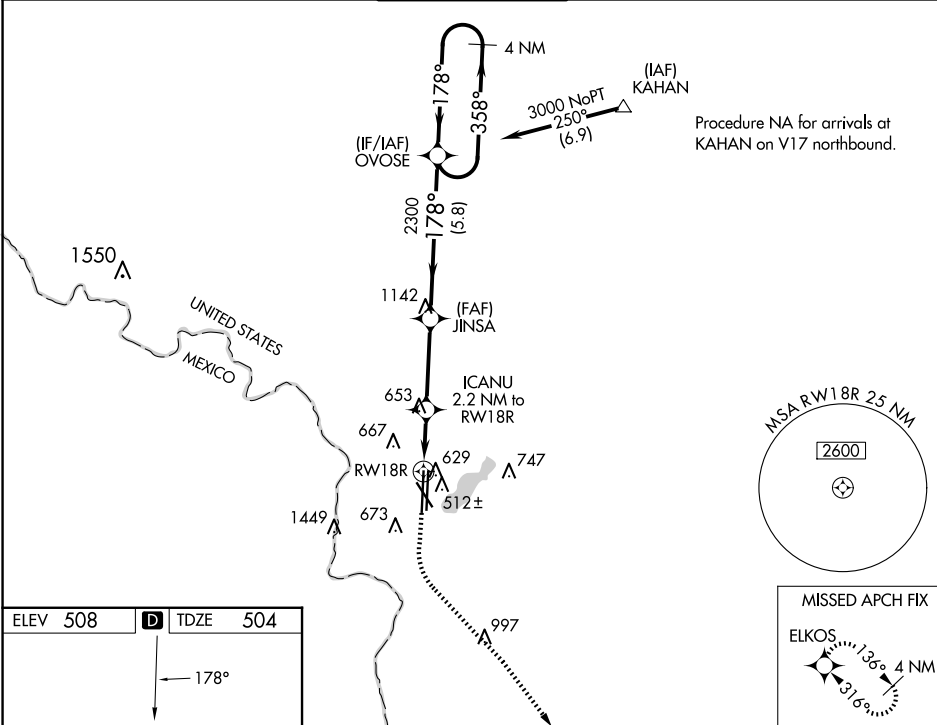

1000 ↑	2500 ↘	ELKOS ✦	VGSI and RNAV glidepath not coincident [VGSI Angle 3.00/TCH 50].		4 NM Holding Pattern
*LNAV only		ICANU 2.2 NM to RW18R	JINSA 2300	OVQSE	358° → ← 178° 3000
↘ RW18R		*1 NM to RW18R	*1260	↘ 2300	GP 3.00° TCH 57
1 NM		1.2	3.3 NM	5.8 NM	
CATEGORY		A	B	C	D E
LPV DA		704-½ 200 (200-½)			
LNAV/ VNAV DA		810-½ 306 (400-½)			
LNAV MDA		880-½ 376 (400-½)		880-⅝ 376 (400-⅝)	
CIRCLING		940-1 432 (500-1)	980-1 472 (500-1)	1100-1½ 592 (600-1½)	1200-2¼ 692 (700-2¼) 1200-2½ 692 (700-2½)