WAAS CH 53528 W18A	APP CRS 180°	Rwy ldg 5199 TDZE 430 Apt Elev 430

RNAV (GPS) RWY 18

LAWRENCEVILLE-VINCENNES INTL (LWV)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA 656 feet; increase LNAV/VNAV DA to 902 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM; and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH: Climb to 2600 direct VOCUT and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 343.7	122.8 (CTAF) L

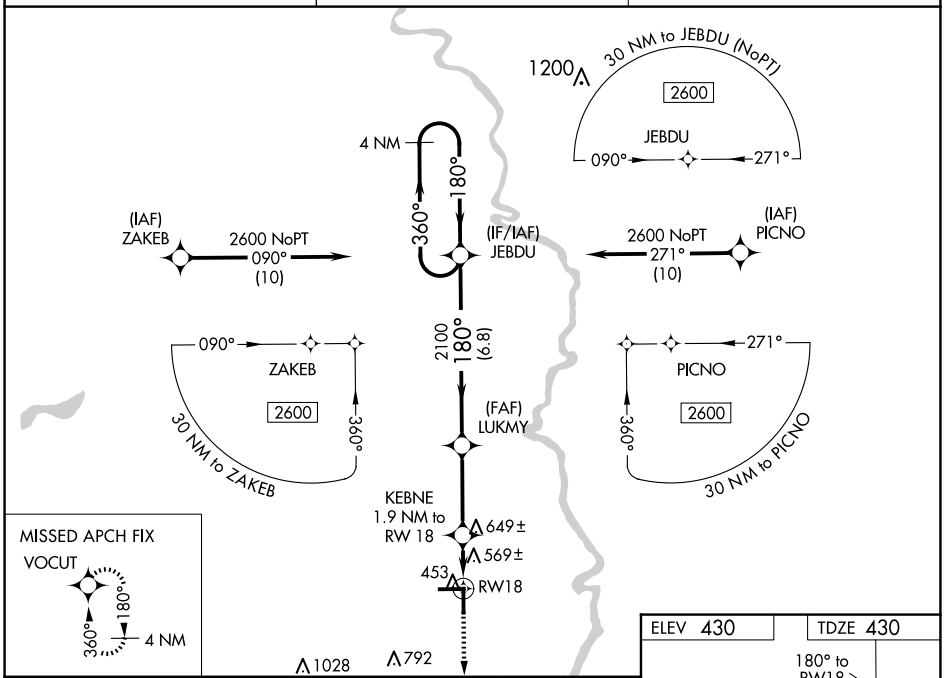

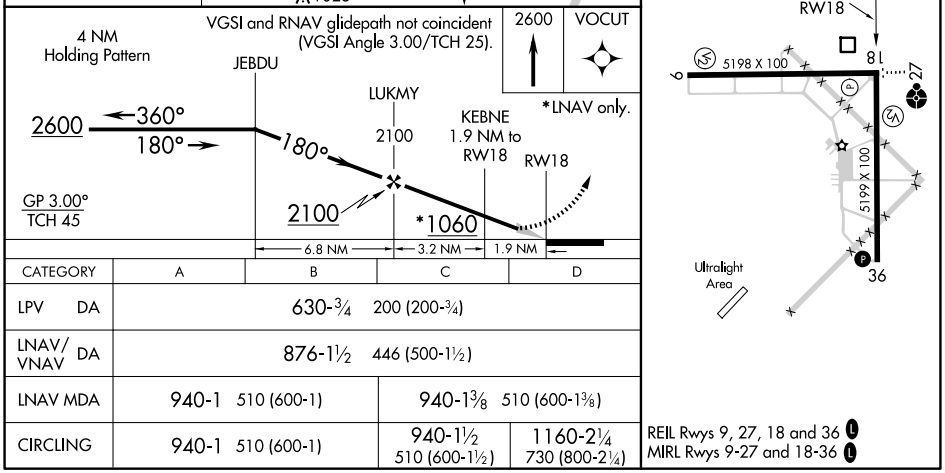

CATEGORY	A	B	C	D
LPV DA	630-¾ 200 (200-¾)			
LNAV/VNAV DA	876-1½ 446 (500-1½)			
LNAV MDA	940-1 510 (600-1)		940-1⅜ 510 (600-1⅜)	
CIRCLING	940-1 510 (600-1)		940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 15 MAY 2025 to 12 JUN 2025
EC-3, 15 MAY 2025 to 12 JUN 2025