

LOC/DME I-LAX	APP CRS	Rwy Idg	25L	25R
109.9	251°	TDZE	11095	11134
Chan 36		Apt Elev	104	104
			128	128

ILS or LOC RWY 25L
LOS ANGELES INTL (LAX)


RNP APCH - GPS. From CLPUR or CRCUS or SEAVU or TRNDU.
DME or RADAR required.
Simultaneous approach authorized. Simultaneous approach authorized with HHR.

ALSIF-2
Rwy 25L

MALSR
Rwy 25R

MISSED APPROACH: Climb to 2000 on heading 251° until crossing the SMO R-160, then left turn on heading 236° and on the SMO R-195 to CATLY INT/ SMO 15.7 DME and hold.

D-ATIS ARR 133.8 DEP 135.65	SOCAL APP CON 124.3 363.2 (APCH FM WEST) 124.5 235.975 (225°-044°)	124.9 269.0 (090°-224°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER N 133.9 239.3 S 120.95 379.1	GND CON N 121.65 327.0 S 121.75 327.0 W 121.4 327.0	CLNC DEL 120.35 327.0	CPDLC
---	--	--	--	---	---	-------

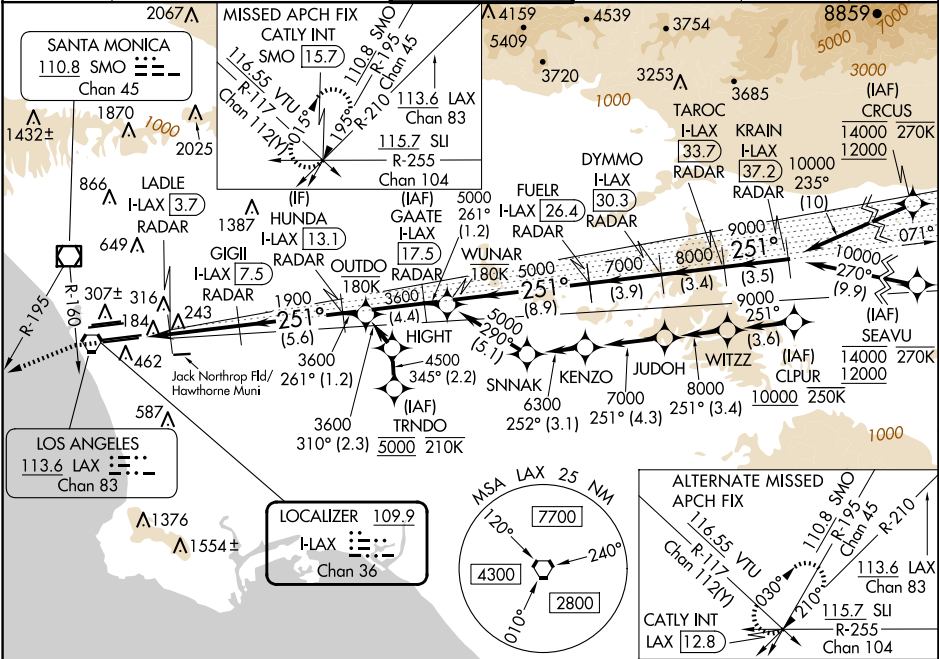

2000 hdg 251°	SMO R-160 hdg 236°	SMO R-195	CATLY INT	TAROC I-LAX [33.7] RADAR	KRAIN I-LAX [37.2] RADAR	GAATE I-LAX [26.4] RADAR	FUELR I-LAX [30.3] RADAR	DYMMO I-LAX [30.3] RADAR	10000
I-LAX [2] RADAR	LADLE I-LAX [3.7] RADAR	GIGIL I-LAX [7.5] RADAR	HUNDA I-LAX [13.1] RADAR	1900	3600	5000	7000	8000	9000
1 NM	0.8	3.7 NM	5.6 NM	4.4 NM	8.9 NM	3.9 NM	3.4 NM	3.5 NM	
CATEGORY	A	B	C	D					
S-ILS 25L	304/18 200 (200-½)								
S-LOC 25L	480/24 376 (400-½)			480/35 376 (400-¾)					
SIDESTEP 25R	480/55 376 (400-1)				480-1½ 376 (400-1½)				

ELEV 128

TDZE 25L 104
TDZE 25R 104

TDZ/CL Rwy 6R, 7L, 24R, and 25L
HIRL all Rwy

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SW-3, 15 MAY 2025 to 12 JUN 2025

SW-3, 15 MAY 2025 to 12 JUN 2025