



WAAS CH 56201 W27B	APP CRS 274°	Rwy Idg TDZE 26 Apt Elev 33	9482
--	------------------------	---	-------------

RNAV (GPS) RWY 27L
MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.			MISSED APPROACH: Climb to 2000 direct SUROY and hold.			
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV ▲ NA below 2°C or above 54°C.						
ATIS 132.55	ORLANDO APP CON 132.65 281.425	MELBOURNE TOWER ★ 118.2(CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 132.65 (When twr closed)	UNICOM 122.95

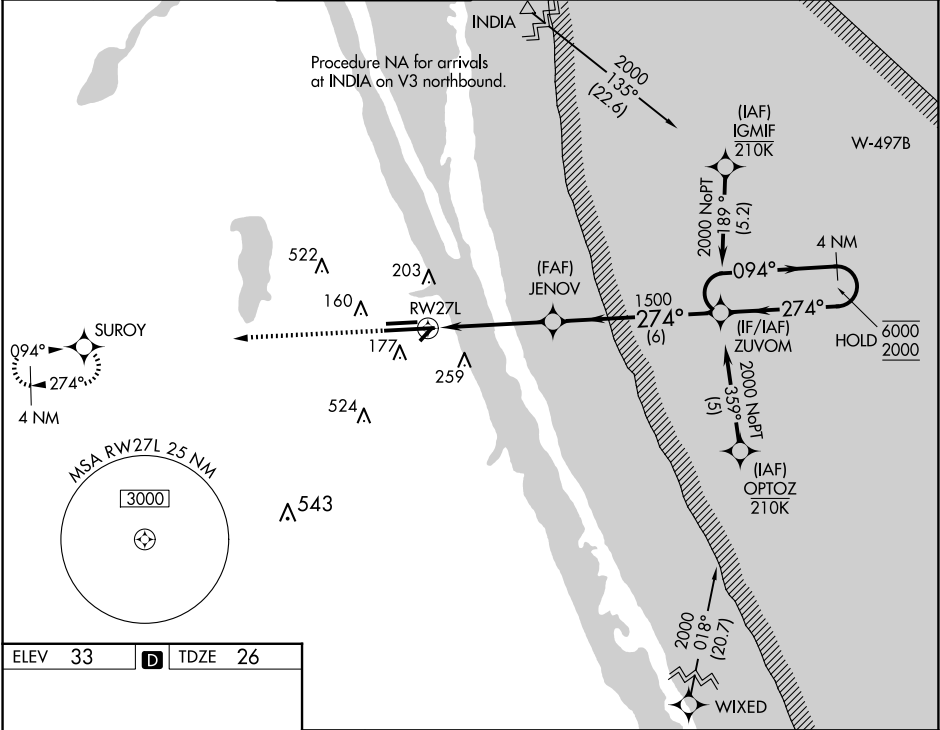

ELEV 33	D	TDZE 26
---------	----------	---------

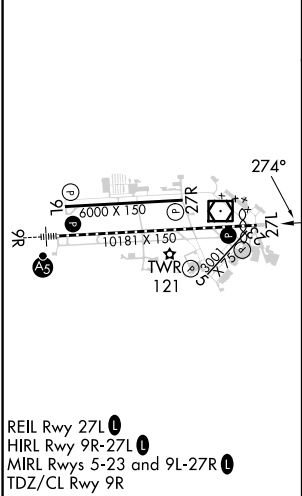

2000	SUROY				
		JENOV	ZUVOM	4 NM Holding Pattern	
		1.3 NM to RWY 27L	1500	094° → 6000	← 274° 2000
		RWY 27L	1500	GP 3.00° TCH 52	
		1.3 NM	3.2 NM	6 NM	
CATEGORY	A	B	C	D	
LPV DA	226-¾		200 (200-¾)		
LNAV/VNAV DA	318-¾		292 (300-¾)		
LNAV MDA	500-1	474 (500-1)	500-1¾	474 (500-1¾)	
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)	

SE-3, 15 MAY 2025 to 12 JUN 2025

SE-3, 15 MAY 2025 to 12 JUN 2025