

MIAMI, FLORIDA



AL-257 (FAA)



24137

APP CRS 272°	Rwy Idg	12755
	TDZE	9
	Apt Elev	9

RNAV (RNP) Z RWY 27
MIAMI INTL (MIA)

RNP AR APCH-GPS.				MALSR			MISSED APPROACH: Climb to 800 then climbing right turn to 4000 direct BRBRA and hold, continue climb-in-hold to 4000.	
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below 8°C or above 54°C. For inop ALS, increase RNP 0.11 visibility to RVR 4500 all Cats.								
D-ATIS ARR 119.15 DEP 133.675	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)		348.6	CLNC DEL 135.35	CPDLC	

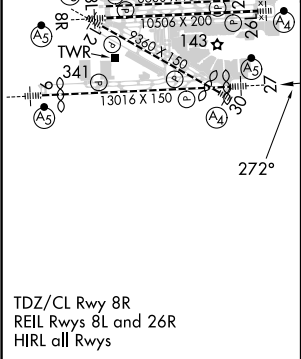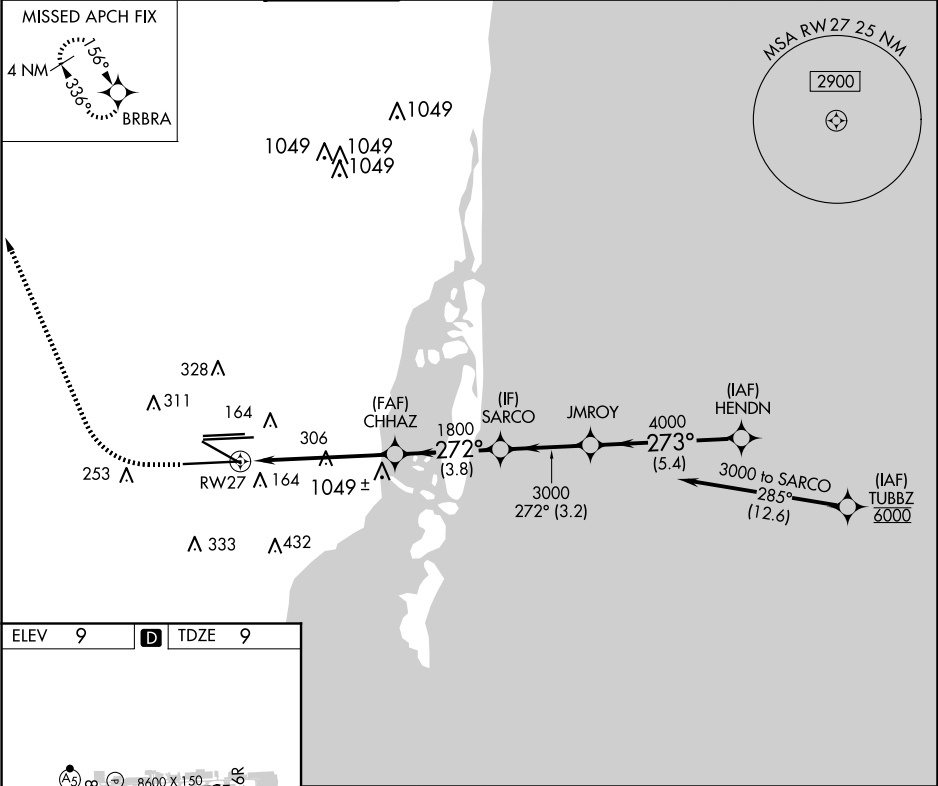

800	4000	BRBRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				HENDN
			CHHAZ	SARCO	JMROY		<u>5000</u>
			1800				
				<u>3000</u>			
			5.5 NM	3.8 NM	3.2 NM	5.4 NM	GP 3.00° TCH 55
CATEGORY		A		B		C	
RNP 0.11 DA				327/24 318 (400-½)			
RNP 0.30 DA				405/35 396 (400-¾)			
AUTHORIZATION REQUIRED							

MIAMI, FLORIDA
Amdt 3 12AUG21

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Z RWY 27

SE-3, 15 MAY 2025 to 12 JUN 2025

SE-3, 15 MAY 2025 to 12 JUN 2025