
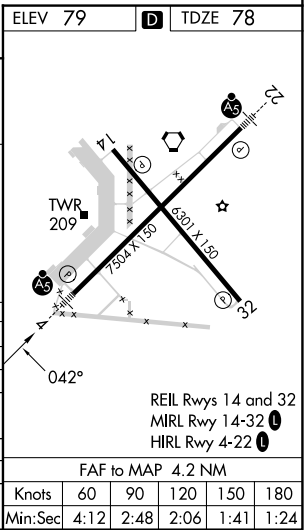
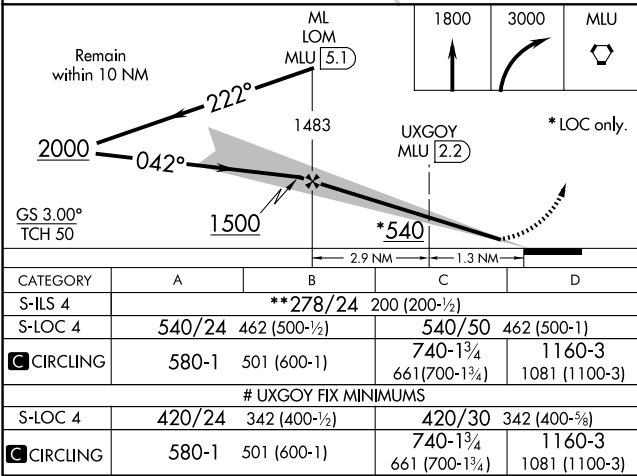


LOC I-MLU	APP CRS	Rwy Idg	7504
109.5	042°	TDZE	78
		Apt Elev	79

ILS or LOC RWY 4
MONROE RGNL (MLU)

ADF or DME required for procedure entry.				MALSR	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.
⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM. ⚠ UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500. ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA. # DME from MLU VORTAC.				AS	
ATIS	MONROE APP CON *	MONROE TOWER *	GND CON	CLNC DEL	UNICOM
125.05	118.15 290.475	118.9 (CTAF) 0 257.8	121.9	121.65	122.95

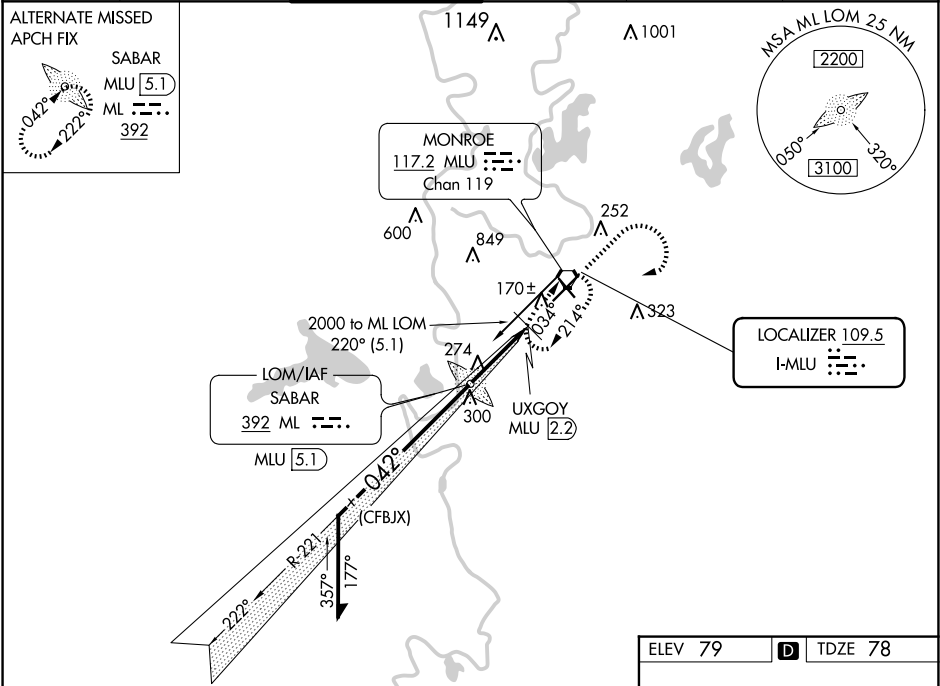

SC-4, 15 MAY 2025 to 12 JUN 2025

SC-4, 15 MAY 2025 to 12 JUN 2025