

LOC I-MSL <u>109.7</u>	APP CRS 297°	Rwy Idg 6694 TDZE 551 Apt Elev 551
----------------------------------	------------------------	---

ILS Z or LOC Z RWY 30
NORTHWEST ALABAMA RGNL (MSL)


DME required. RADAR required.

T DME from MSL DME.
A Simultaneous reception of I-MSL and MSL DME required.
For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM.




MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 020° to intercept RQZ VORTAC R-268 to JOBUM/RQZ VORTAC 42.5 DME/RADAR and hold, continue climb-in-hold to 3000.

ASOS 119,425	MEMPHIS CENTER 120.8 307.0	GCO 121,725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

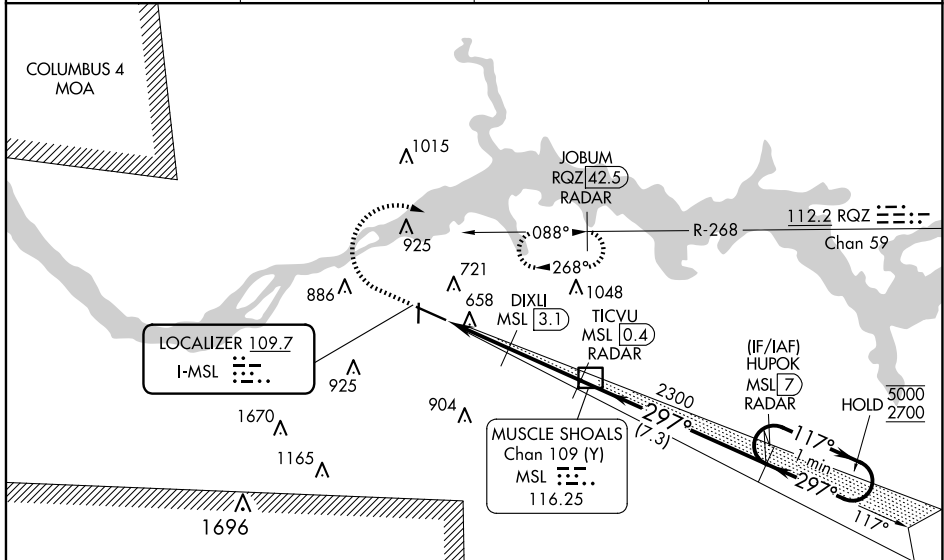

ELEV 551		TDZE 551
----------	--	----------

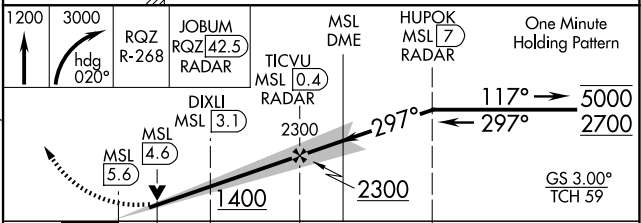

	1 NM	1.5 NM	2.8 NM	7.3 NM	
CATEGORY	A		B	C	D
S-ILS 30	751- $\frac{1}{2}$			200 (200- $\frac{1}{2}$)	
S-LOC 30	920- $\frac{1}{2}$ 369 (400- $\frac{1}{2}$)			920- $\frac{5}{8}$ 369 (400- $\frac{5}{8}$)	
 CIRCLING	1040-1 489 (500-1)			1280-2 729 (800-2)	1280-2 $\frac{1}{4}$ 729 (800-2 $\frac{1}{4}$)