

LOC/DME I-PDX <u>110.5</u> Chan 42	APP CRS 103°		10R	10L
		Rwy Idg	11000	8535
		TDZE	24	30
		Apt Elev	31	31

ILS or LOC RWY 10R

PORTLAND INTL (PDX)

⚠

Simultaneous approach authorized. Inop table does not apply to Sidestep LOC 10L. For inop ALS increase S-ILS 10R Cat E visibility to RVR 4000. For inop ALS increase S-LOC 10R Cat C/D/E visibility to 2½ SM. For inop ALS increase JADNU fix minimums S-LOC 10R Cat C/D/E visibility to RVR 6000. Sidestep NA until passing JADNU.

ALSF-2

Rwy 10R


MALSR

Rwy 10L



MISSED APPROACH:

Climb to 1100 then climbing right turn to 5000 on BTG VORTAC R-160 to MULES/ BTG 17.7 DME and hold, continue climb-in-hold to 5000.

D-ATIS	PORTLAND APP CON	PORTLAND TOWER		GND CON	CINC DEL	CPDLC
128.35	124.35 299.2	Rwy 10L-28R	Rwys 3-21, 10R-28L	121.9 348.6	120.125 318.1	
269.9		118.7 257.8	123.775 251.125			

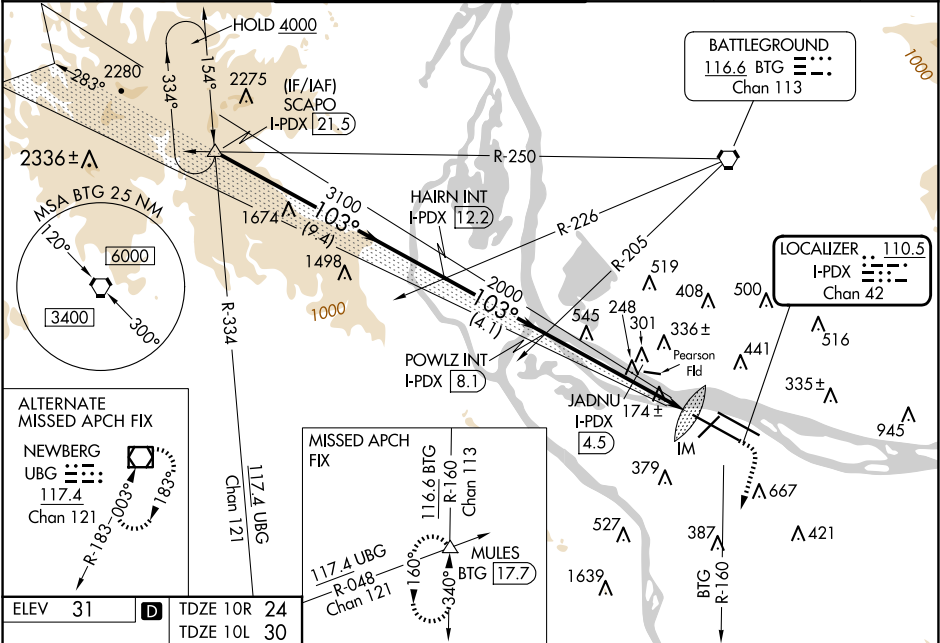

ELEV	31	D	TDZE 10R	24
			TDZE 10L	30

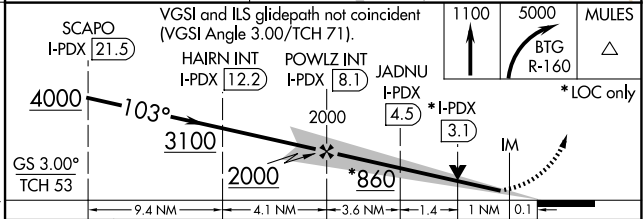

CATEGORY	A	B	C	D	E
S-ILS 10R	224/18 200 (200-½)				
S-LOC 10R	860/24 836 (900-½)	860/40 836 (900-¾)	860-17½ 836 (900-17½)		
C CIRCLING	860-1¼ 829 (900-1¼)		1060-3 1029 (1100-3)		1140-3 1109 (1200-3)
JADNU FIX MINIMUMS					
S-LOC 10R	440/24 416 (500-½)		440/40 416 (500-¾)		
SIDESTEP 10L	800-1 770 (800-1)	800-1¼ 770 (800-1¼)	800-2½ 770 (800-2½)		800-2¾ 770 (800-2¾)

REIL Rwys 3 and 21					
TDZ/CL Rwy 10R					
MIRL Rwy 3-21					
HIRL Rwys 10L-28R and 10R-28L					
FAF to MAP 6 NM					
Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00