


APP CRS	Rwy Idg	7038
046°	TDZE	3075
	Apt Elev	3082

RNAV (RNP) Z RWY 5

ROBERTS FLD (RDM)

RNP AR APCH. RF required.	MISSED APPROACH: Climb to 9500 on track 046° to RARBE right turn to HITGU and on track 175° to SAKKO and hold, continue climb-in-hold to 9500.
For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 53°C.	

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER★ 124.5 (CTAF) 256.8	GND CON 121.8	UNICOM 122.95
-----------------	----------------------------------	--------------------------------------	------------------	------------------

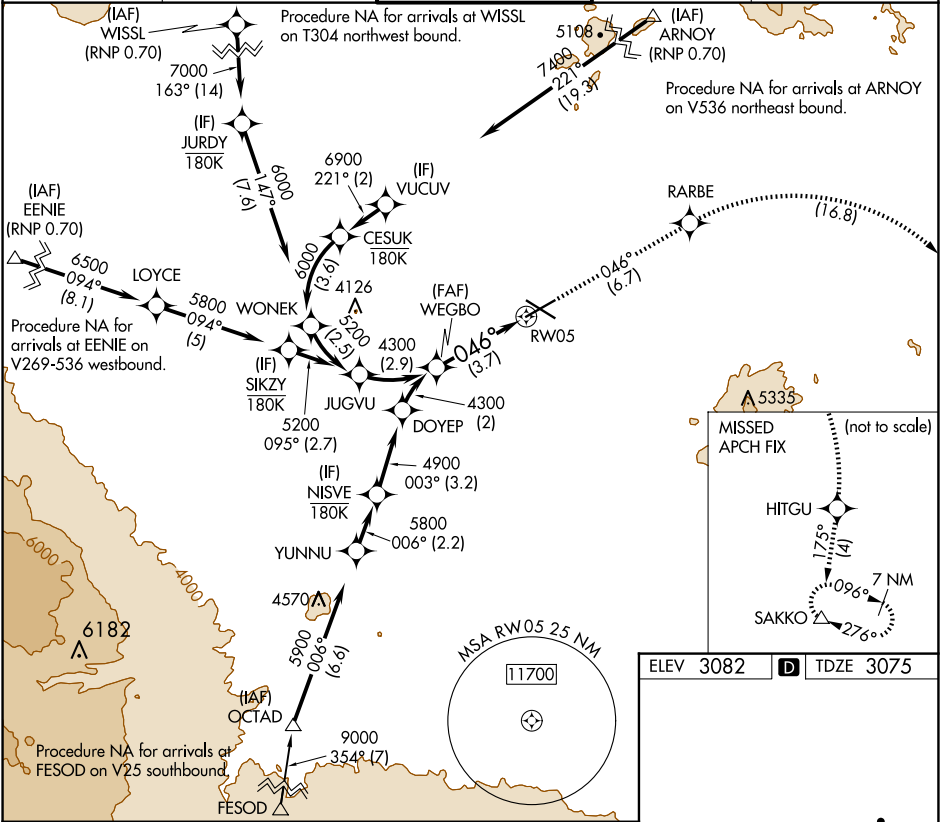

WEGBO		9500 ↑ tr 046°	RARBE ✦	HITGU ✦	tr 175°	SAKKO △
See planview for multiple IF locations.						
4300		046°		RW05		
GP 3.00° TCH 50		3.7 NM				
CATEGORY	A	B	C	D		
RNP 0.10 DA	3351-7⁄8 276 (300-7⁄8)					
RNP 0.30 DA	3574-1⁄8 499 (500-1⁄8)					
AUTHORIZATION REQUIRED						

ELEV 3082 D TDZE 3075

Planview diagram showing RWY 5, RWY 11, and RWY 29. Key features include:

- RWY 5:** 7038 X 150, 046°.
- RWY 11:** 7005 X 100, 036°.
- RWY 29:** 7038 X 150, 29°.
- Obstacles:** 3165, 45, 29.
- Altitudes:** 0.5% UP, 0.3% UP.

REIL Rwy 5, 11, and 29
HIRL Rwy 5-23
MIRL Rwy 11-29