


WAAS CH 82514 W23A	APP CRS 226°	Rwy Idg TDZE Apt Elev	7031 3067 3080
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 23

ROBERTS FLD (RDM)

⚠ ⚠ -17°C For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.	MALSR	MISSED APPROACH: Climb to 8500 direct WELPU and on track 138° to URBIA and hold, continue climb-in-hold to 8500.
--	------------------------------	---

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER★ 124.5 (CTAF) 0 256.8	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

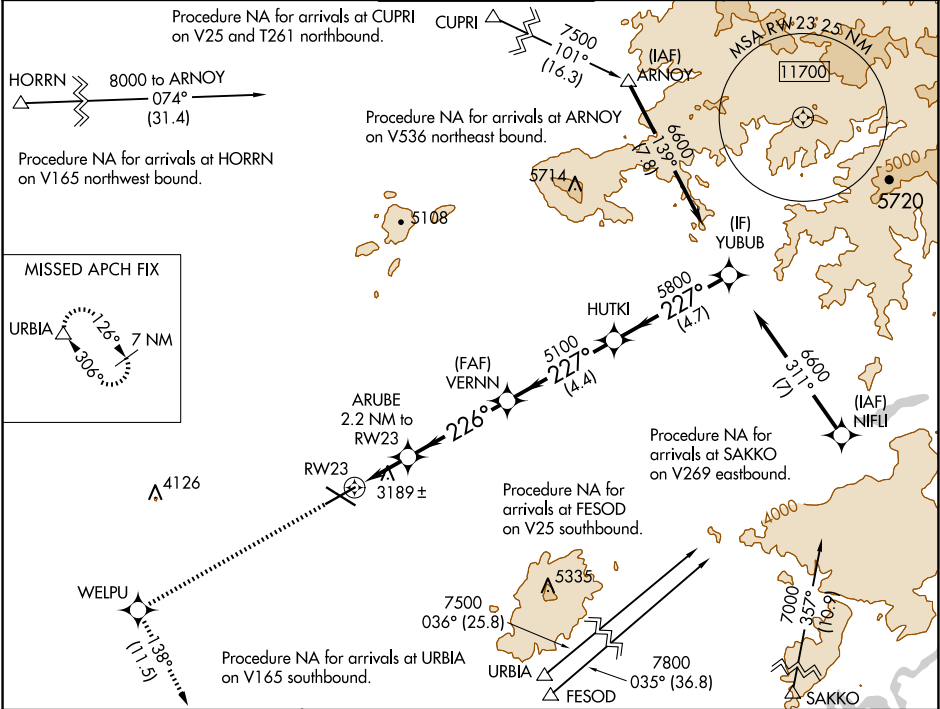

ELEV 3080	D	TDZE 3067	8500	WELPU	tr 138°	URBIA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).			YUBUB
			*LNAV only		ARUBE 2.2 NM to RW23	VERNN 5100	HUTKI	6600		
			*1.1 NM to RW23			226°	227°	5800		
			RW23			3800	5100		GP 3.00° TCH 47	
			1.1 NM		1.1 NM	4.1 NM	4.4 NM	4.7 NM		
			CATEGORY		A	B	C	D		
LPV	DA	3267-½ 200 (200-½)								
LNAV/ VNAV	DA	3383-⅝ 316 (400-⅝)								
LNAV	MDA	3440-½ 373 (400-½)				3440-¾ 373 (400-¾)				
CIRCLING		3540-1 460 (500-1)	3560-1 480 (500-1)	3640-1½ 560 (600-½)	3760-2¼ 680 (700-2¼)					
REIL Rwy 5, 11, and 29										
HIRL Rwy 5-23										
MIRL Rwy 11-29										