

SAN FRANCISCO, CALIFORNIA


AL-375 (FAA)


24305

WAAS CH 48803 W28A	APP CRS 284°	Rwy Idg 11236 TDZE 13 Apt Elev 13
--	------------------------	--

RNAV (GPS) Z RWY 28R
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS.  Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For Inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D visibility to 2 SM.		ALSF-2 	MISSED APPROACH: Climb to 3000 direct VIKYU and hold. *Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see RNAV (GPS) RWY 28L.			
D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1		GND CON 121.8	CLNC DEL 118.2	CPDLC

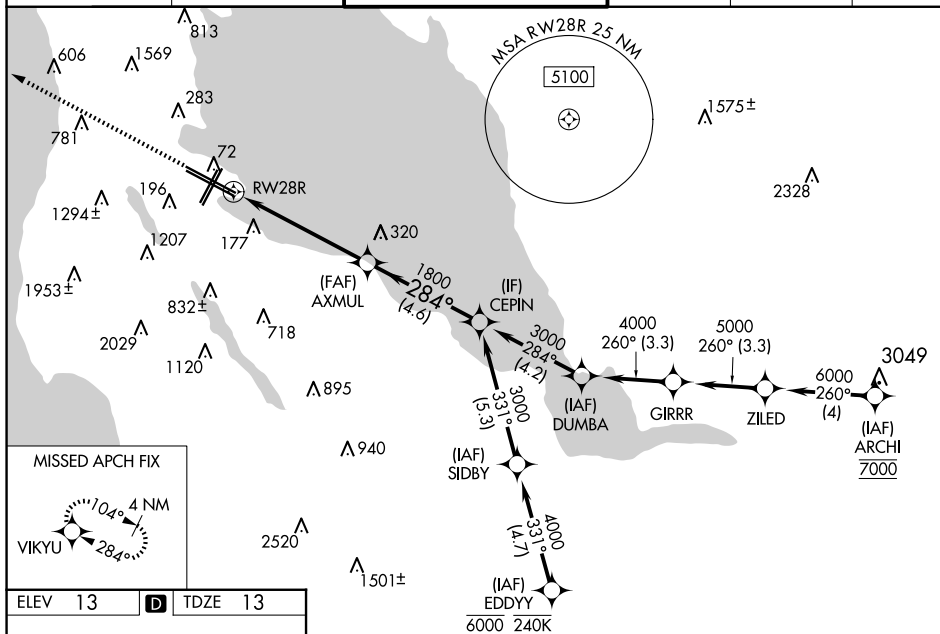

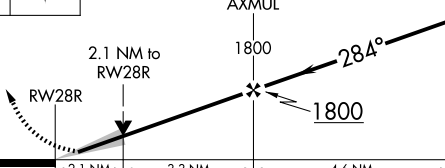 		VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00°/TCH 68).		CEPIN	
					
CATEGORY	A	B	C	D	
LPV DA*	213/18		200 (200-1½)		
RNAV/ VNAV DA	642-1¾		629 (700-1¾)		
RNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1¾	747 (800-1¾)	
 CIRCLING	760-1 747 (800-1)	1020-1½ 1007 (1100-1½)	1640-3 1627 (1700-3)	NA	

SAN FRANCISCO, CALIFORNIA
Amdt 8 31OCT24

37°37'N-122°23'W

SAN FRANCISCO INTL (SFO)

RNAV (GPS) Z RWY 28R

SW-2, 15 MAY 2025 to 12 JUN 2025