
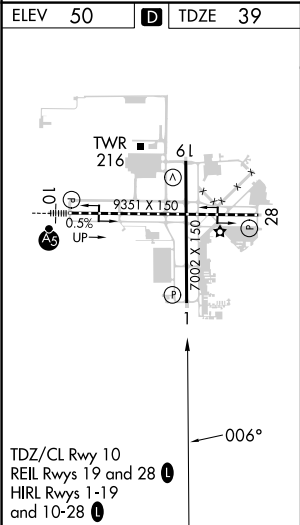


WAAS CH 45515 W01A	APP CRS 006°	Rwy Idg 7002 TDZE 39 Apt Elev 50
--	------------------------	---

RNAV (GPS) RWY 1

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.				MISSED APPROACH: Climb to 2500 direct SUTME and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).					
ATIS 123.75	SAVANNAH APP CON★ 120.4 353.775	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95

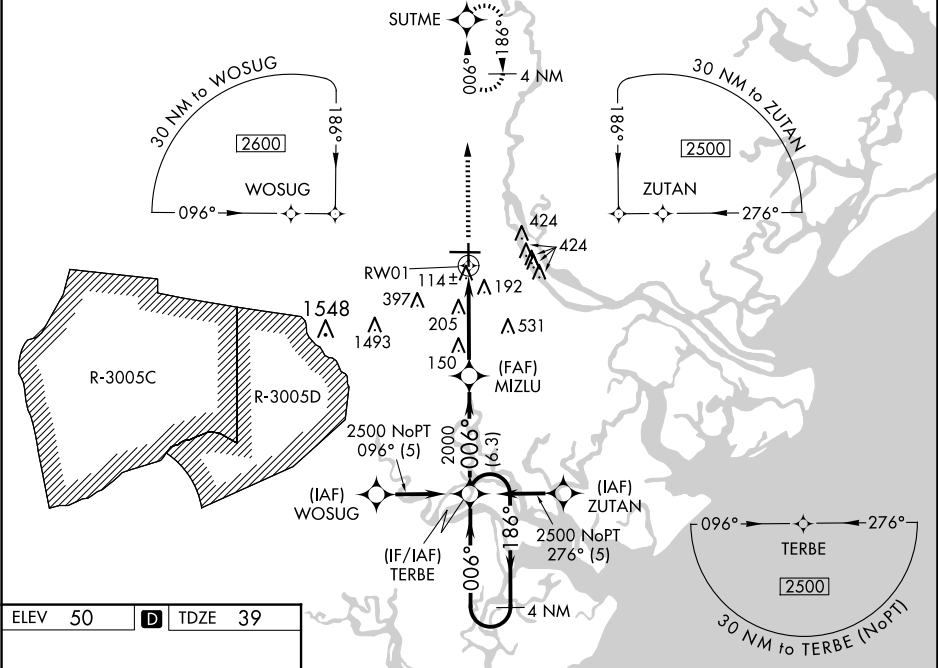

2500

↑

SUTME

✦

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 74).

TERBE

4 NM

Holding Pattern

*LNAV only.

*1.3 NM to RW01

RW01

MIZLU

2000

006°

186°

2500

← 006°

GP 3.00°

TCH 57

1.3 NM

4.6 NM

6.3 NM

CATEGORY	A	B	C	D
LPV DA	239/40		200 (200-¾)	
LNAV/VNAV DA	384/60		345 (400-1¼)	
LNAV MDA	520/55	481 (500-1)	520-1⅓	481 (500-1⅓)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)