

LOC/DME I-RMT	APP CRS	Rwy Idg
110.35	126°	8279
Chan 40 (Y)		TDZE 3963
		Apt Elev 3967


ILS or LOC/DME RWY 12

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)


When local altimeter setting not received, use Alliance altimeter setting and increase DA 91 feet; all MDAs 100 feet, and S-LOC 12 and Circling Cat B/C/D visibilities ¼ mile. For inoperative MALSR, when using Alliance altimeter setting, increase S-ILS 12 visibility to 1. VDP NA when using Alliance altimeter setting.

MALSR MISSED APPROACH: Climb to 4500 then climbing left turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.

ASOS 121.025	DENVER CENTER 127.95 338.2	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	--

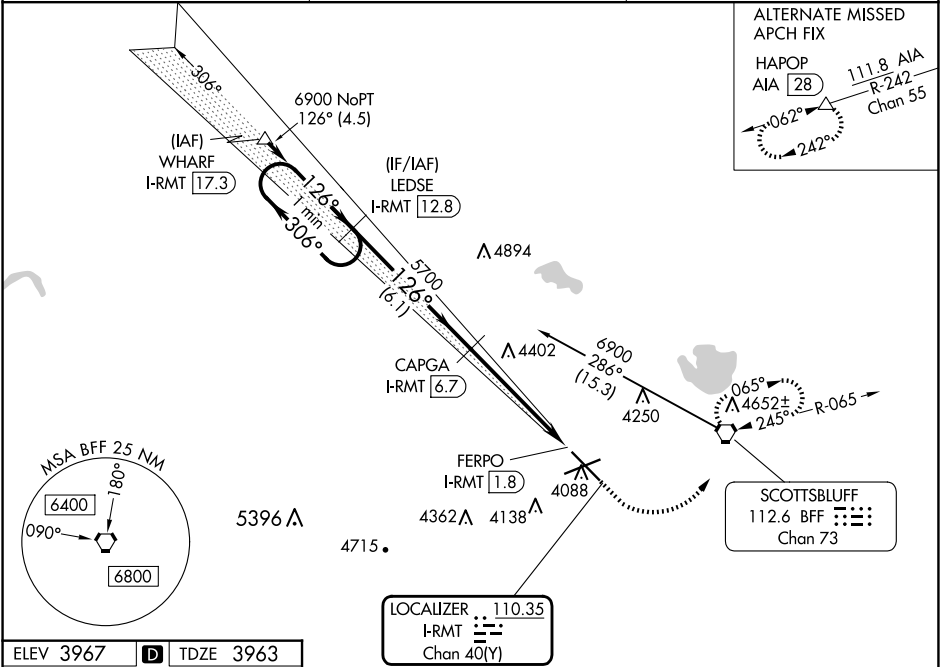

ELEV 3967	D	TDZE 3963
------------------	----------	------------------

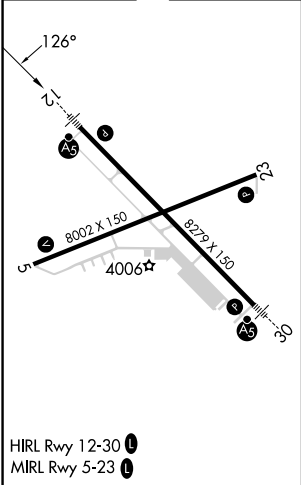

SCOTTSBLUFF, NEBRASKA
Orig-B 30JAN20

DME REQUIRED			
ILS unusable from FERPO/1.8 DME inbound.			
One Minute Holding Pattern			
LEDSE I-RMT 12.8			
CAPGA I-RMT 6.7			
GS 3.00° TCH 57			
6.1 NM 3.2 NM 1.7 NM 0.3			
CATEGORY	A	B	C
S-ILS 12	4163-½ 200 (200-½)		
S-LOC 12	4640-½ 677 (700-½)	4640-1½ 677 (700-1½)	4640-1¾ 677 (700-1¾)
CIRCLING	4640-1 673 (700-1)	4640-2 673 (700-2)	4740-2½ 773 (800-2½)

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)
41°52'N-103°36'W

ILS or LOC/DME RWY 12