




HI-ILS or LOC Z RWY 4L

RADAR or DME Required.		
------------------------	--	--

ATIS ★	SHAW APP CON	SHAW TOWER ★	GND CON	CLNC DEL
132.125 270.1	125.4 318.1	126.65 254.25	126.1 275.8	126.1 275.8

Λ 2047

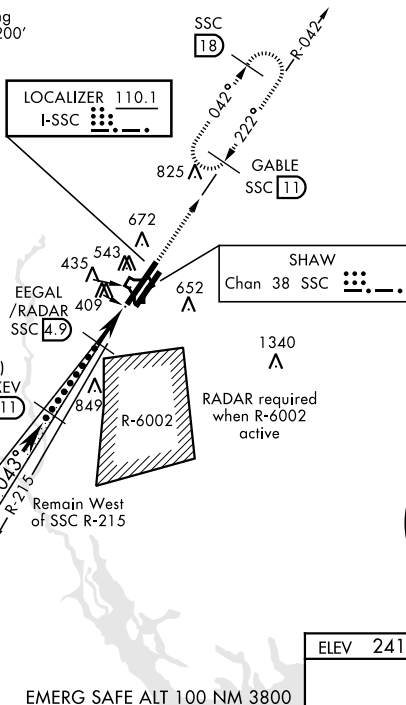

CATEGORY	C	D	E
S-ILS 4L *	490/50	250	(300-1)
S-LOC 4L *	780/55	540	(600-1)
SIDESTEP * 4R	780-1 3/8	544	(600-1 3/8)
 CIRCLING	1000-2 1/4 759 (800-2 1/4)	1000-2 1/2 759 (800-2 1/2)	1000-2 3/4 759 (800-2 3/4)

ELEV 241

TDZE 4L 240
TDZE 4R 236

519 A

502 ☆

450 A

392 A

389 A

043° 3.7 NM from FAF

10,014 x 150
8014 x 150

HIRL all Rwy

TWR 340

FAF to MAP 3.1 NM

	Knots	120	140	160	180	200
Min:Sec	1:33	1:20	1:10	1:02	0:56	

33°58'N-80°28'W

SHAW AFB (KSSC)

Amdt 1 10OCT19

HI-ILS or LOC Z RWY 4L