

WAAS CH 86245 W13A	APP CRS 128°	Rwy Idg 9111 TDZE 115 Apt Elev 115
--	------------------------	---

RNAV (GPS) RWY 13
VICTORIA RGNL (VCT)

RNP APCH-GPS.





For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to $\frac{3}{4}$ SM and LNAV Cat E visibility to 1 SM.

MALS®



MISSED APPROACH:
Climb to 2200 direct
SEYOG and hold.

ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 0 257.95	GND CON 120.525 239.25	UNICOM 122.7
-----------------	--------------------------------	---	---------------------------	-----------------

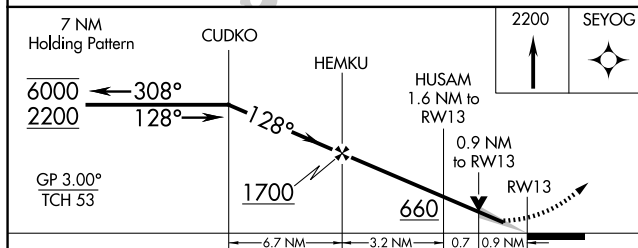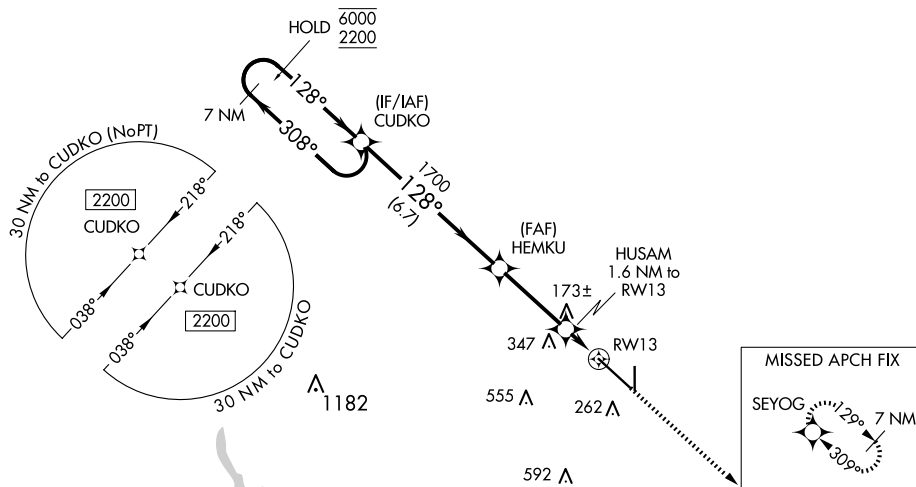

CATEGORY	A	B	C	D	E
LPV DA	315-1/2 200 (200-1/2)				
LNAV/ VNAV DA	365-1/2 250 (300-1/2)				
LNAV MDA	440-1/2 325 (400-1/2)				
C CIRCLING	580-1 465 (500-1)	820-2 705 (800-2)	880-2 1/2 765 (800-2 1/2)	NA	

