


SE-3, 15 MAY 2025 to 12 JUN 2025

D-ATIS
123.75
CLNC DEL
121.6 284.6
CPDLC
GND CON
121.9 284.6
PALM BEACH TOWER
119.1 257.8
PALM BEACH DEP CON
127.35 343.6



TOP ALTITUDE:
RWY 10L/28R: 4000
RWY 14/32: 1500

RNAV 1-DME/DME/IRU or GPS.
RADAR required.

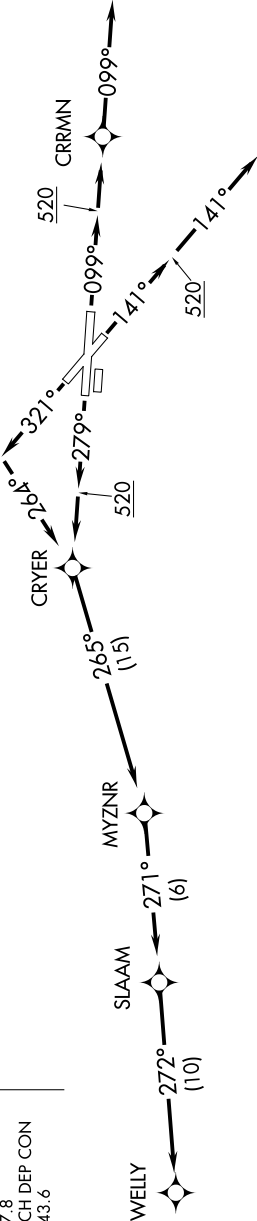

TAKEOFF MINIMUMS
Rwy 10L, 14, 28R: Standard.
Rwy 32: Standard with minimum climb of 500 feet per NM to 520.

NOTE: Jet aircraft only.
NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 10L: Climb on heading 099° to 520, then direct CRRMN, then on heading 099° or as assigned by ATC, for vectors to SLAAM, thence
TAKEOFF RUNWAY 14: Climb on heading 141° to 520, then on heading 141° or as assigned by ATC, for vectors to SLAAM, thence
TAKEOFF RUNWAY 28R: Climb on heading 279° to 520, then direct CRYER, then on depicted route to SLAAM, thence
TAKEOFF RUNWAY 32: Climb on heading 321° to intercept course 264° to CRYER, then on depicted route to SLAAM, thence . . .
... on track 272° to WELLY. Rwys 10L/28R maintain 4000. Rwys 14/32 maintain 1500. Expect filed altitude within 10 minutes after departure.