

LOC/DME I-JAC 109.1 Chan 28	APP CRS 187°	Rwy Idg 6300 TDZE 6451 Apt Elev 6451
---	------------------------	---

ILS Y or LOC Y RWY 19
JACKSON HOLE (JAC)

RADAR required for procedure entry at MOSSS.

 Circling NA for Cats A, B and C east of Rwy 1-19. Circling NA for Cat D. For inop ALS, increase SOSUE fix minimums S-LOC 19 Cats C and D visibility to 2½ SM. For inop ALS, increase S-LOC Cat C and D visibility to 3 SM.



MALS




MISSED APPROACH: Climb to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.

D-ATIS 120.625	SALT LAKE CENTER 133.25 285.6	JACKSON TOWER ★ 118.075 (CTAF) 0	GND CON 124.55	UNICOM 122.95
-------------------	----------------------------------	-------------------------------------	-------------------	------------------

MISSED APCH FIX

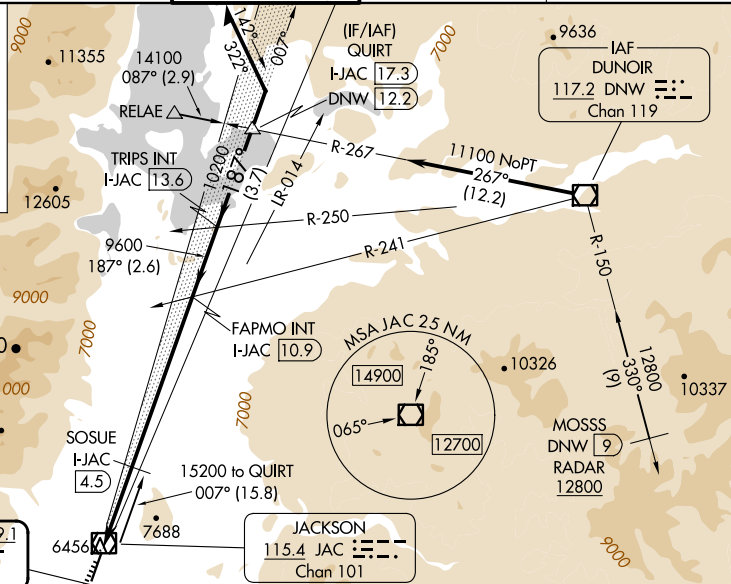

ELEV 6451	D	TDZE 6451
-----------	----------	-----------

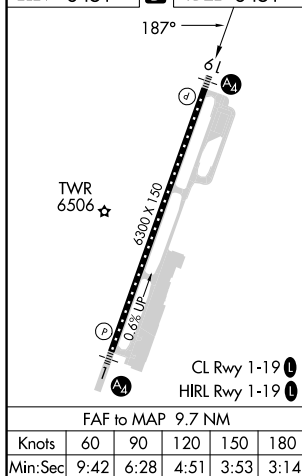

14000
↑
JAC R-192

KICNE
△

Use I-JAC DME when on the localizer course.

QUIRT
I-JAC 17.3
DNW 12.2

Remain within 10 NM

14100

007°

13100

187°

11100

GS 3.00°
TCH 50

I-JAC 1.2

I-JAC 3.7

SOSUE I-JAC 4.5

FAPMO INT I-JAC 10.9

I-JAC 13.6

9600

10200

7540

9600

2.5 NM

0.8

6.5 NM

2.6 NM

3.7 NM

CATEGORY	A	B	C	D
S-ILS 19	7077-1½ 626 (700-1½)			
S-LOC 19	7540/55 1089 (1100-1)	7540-1¼ 1089 (1100-1¼)	7540-2½ 1089 (1100-2½)	
CIRCLING	7540-1¼ 1089 (1100-1¼)	7540-1½ 1089 (1100-1½)	7540-3 1089 (1100-3)	NA
SOSUE FIX MINIMUMS (DME REQUIRED)				
S-LOC 19	7300/40 849 (900-¾)	7300/55 849 (900-1)	7300-2 849 (900-2)	
CIRCLING	7300-1¼ 849 (900-1¼)		7400-2¾ 949 (1000-2¾)	NA