

WAAS CH 70609 W28A	APP CRS 288°	Rwy Idg 5904 TDZE 91 Apt Elev 99
--	------------------------	---

RNAV (GPS) RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FLD (MOD)

RNP APCH.


T
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM.

MALSR




MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct SHEL and hold. continue climb-in-hold to 3000.

ATIS 127.7	NORCAL APP CON 120.95 269.45	MODESTO TOWER ★ 125.3 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95
---------------	---------------------------------	---	------------------	------------------

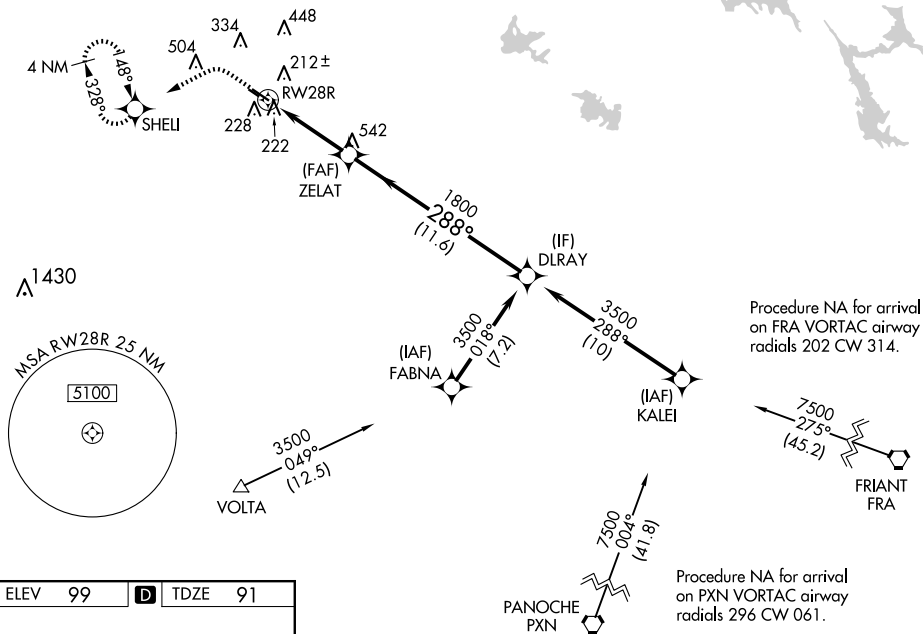

ELEV	99	D	TDZE	91
------	----	----------	------	----



REIL Rwy 10L **L**
MIRL Rwy 10R-28L
HIRL Rwy 10L-28R **L**

The diagram illustrates a flight path starting from RW28R (Runway 28 Right) and heading towards DRAY. Key features include:

- Navigation Aids:** *LNAV only, *2 NM to RW28R, ZELAT, DRAY.
- Distances:** 2 NM, 3.2 NM, 11.6 NM, 1800, 3500.
- Angles:** 288°.
- GP 3.00° TCH 53**

CATEGORY	A	B	C	D
LPV DA	291-½ 200 (200-½)			
LNAV/VNAV DA	393-½ 302 (300-½)			
LNAV MDA	480-½ 389 (400-½)		480-⅝ 389 (400-⅝)	
C CIRCLING	540-1 441 (500-1)	600-1 501 (600-1)	700-1¾ 601 (700-1¾)	820-2¼ 721 (800-2¼)