

WAAS
CH **86419**
W14A

APP CRS
139°

Rwy Idg
TDZE **755**
Apt Elev **755**

RNAV (GPS) RWY 14L

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet and all MDA 60 feet, increase LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Baro-VNAV and ASR VDP NA when using Rantoul altimeter setting.

MISSED APPROACH: Climb to 2600 direct ODEBE and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	CLNC DEL 128.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

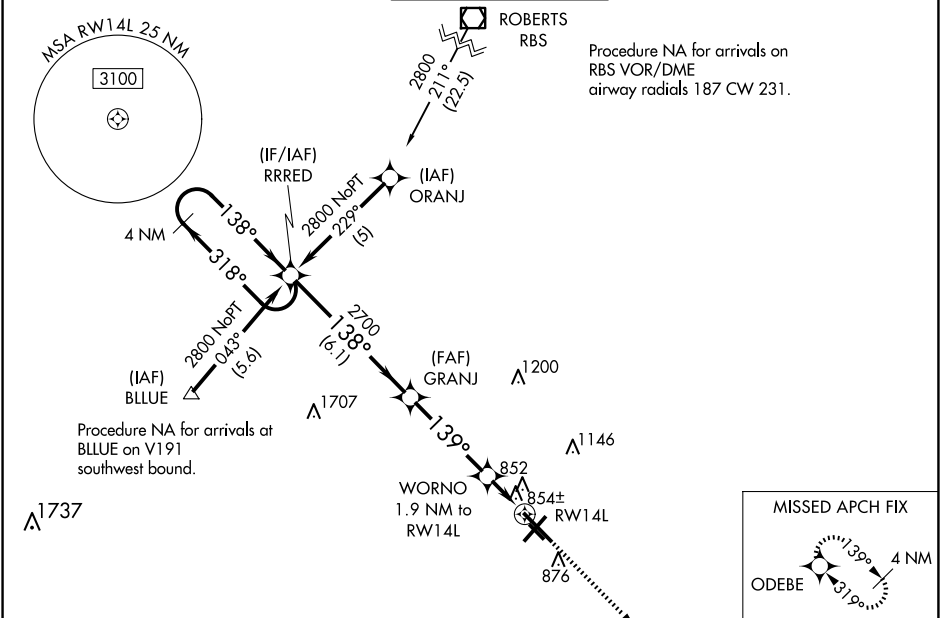

4 NM Holding Pattern					RRRED		2600		ODEBE		
2800		← 318°		138° →		138°		2700		GRANJ	
GP 3.00°		TCH 48		2700		139°		WORNO		1.9 NM to RW14L	
				6.1 NM		4 NM		0.9		1 NM	
CATEGORY		A		B		C		D			
LPV DA				955-¾		200 (200-¾)					
LNAV/VNAV DA				1170-1½		415 (500-1½)					
LNAV MDA				1120-1		365 (400-1)		1120-1¼		365 (400-1¼)	
CIRCLING		1240-1		485 (500-1)		1500-2¼		1500-2½		745 (800-2¼)	

139°

14L

14R

32L

32R

8101 X 130

6502 X 150

3816 X 75

TWR 825

139°

14L

14R

32L

32R

8101 X 130

6502 X 150

3816 X 75

TWR 825

139°

14L

14R

32L

32R

8101 X 130

6502 X 150

3816 X 75

TWR 825

HIRL Rwy 14L-32R 1

MIRL Rwy 4-22 1

MIRL Rwy 14R-32L